



"WE MAKE THE KITCHEN BETTER!"

Toll Free: 855-855-0399 Email: info@atosausa.com

www.atosa.com | www.atosausa.com

California, Colorado, Florida, Georgia, Illinois,
Massachusetts, New Jersey, Ohio, Texas, Washington

Countertop Glassdoor Merchandisers

Standard Features

- Black exterior cabinet with black door frame and white interior
- Environmentally friendly R600a refrigerant
- CTD-3/CTD-5 are forced air cooling and CTD-3S is cold wall cooling
- Foamed-in-place high density polyurethane insulation
- Double pane glass door with recessed door handle
- Door lock standard
- Mechanical controller
- Pre-installed removable PVC coated wire shelves standard
- Certified for packaged foods and bottled beverages
- Maintains temperatures between 33°F- 41°F
- Magnetic door gasket standard for positive door seal
- LED interior lighting
- Leveling legs
- 5' cord with NEMA 5-15 plug standard

MODELS:

CTD-3 / CTD-3S / CTD-5



CTD-3



CTD-3S



CTD-5

For the best results of food preservation we recommend setting your refrigerator between 33 °F to 38 °F

1. Don't forget to leave the unit some room to breathe!
2. Please clean the condenser frequently to give the unit more fresh air.



1 YEAR PARTS AND LABOR WARRANTY (US ONLY)
5 YEAR COMPRESSOR PART WARRANTY (US ONLY)





"WE MAKE THE KITCHEN BETTER!"

Toll Free: 855-855-0399 Email: info@atosausa.com


www.atosa.com | www.atosausa.com

California, Colorado, Florida, Georgia, Illinois,
Massachusetts, New Jersey, Ohio, Texas, Washington

SPECIFICATIONS

Models	Door	Capacity (Cu.Ft.)	Shelves	Amps(A)	Voltage (V/Hz/Ph)	HP	Refrigerant	Exterior Dimensions (inch)	Interior Dimensions (inch)	Net Weight (lbs)	Gross Weight (lbs)
CTD-3	1	2.4	3	1.5	115/60/1	1/10	R600a	17 ^{1/4} ×19 ^{3/4} ×27 ^{1/2}	14 ^{3/8} ×15×23	53	57
CTD-3S	1	2.4	3	1.5	115/60/1	1/8	R600a	18 ^{1/8} ×18 ^{1/2} ×33	14 ^{1/2} ×13×22	64	70
CTD-5	1	4.6	4	1.7	115/60/1	1/8	R600a	21 ^{1/4} ×22×33 ^{3/4}	18×17×29	88	95

PLAN VIEW

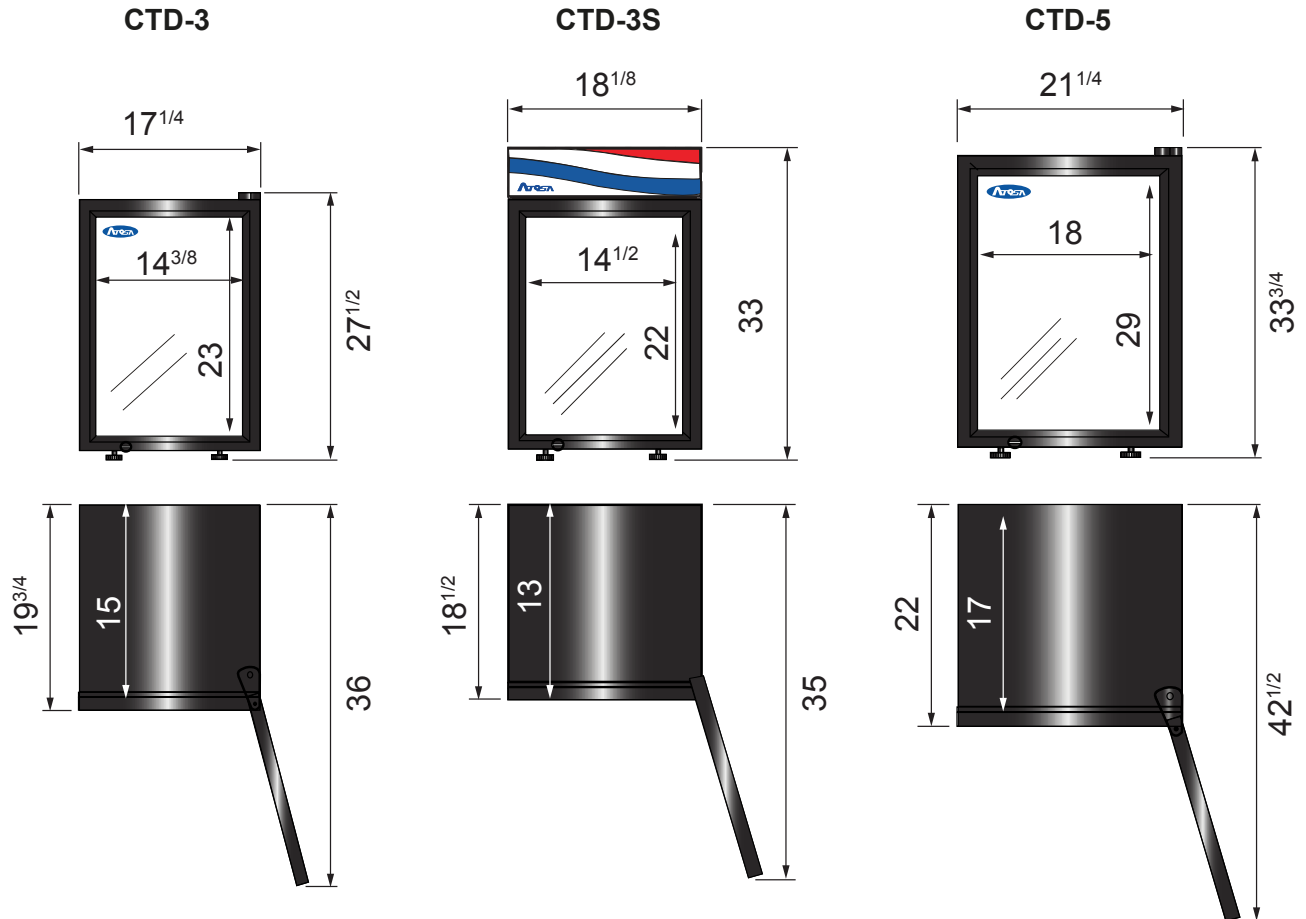

Door lock

LED lights

Epoxy shelves

