III.	BEVERAGE-AIR.
------	---------------

GF BAR EQUIPMENT

GF34HC Glass and Plate Froster **Hydrocarbon Series**

MODELS: GF34HC-B GF34HC-S





3 Year Parts/Labor Warranty Additional 4 Year Compressor Warranty

CABINET CONSTRUCTION

- Exterior is available in wear resistant vinyl on steel in black finish or stainless steel
- Interior construction utilizes galvanized steel
- Standard interior construction utilizes galvanized steel
- Top includes easy glide, stainless steel lids and stainless steel counter top with edge
- Two (2) shelves and bottom rack standard
- Two (2) shelf ledges standard with three (3) mounting points
- Flexibility in design provides for plate storage and chilling
- · Automatic defrost of coil is standard
- Built-in condensate evaporator system
- No floor drain or additional plumbing is needed

OPTIONS & ACCESSORIES

- Stainless steel interior
- Locks
- Remote option* (refrigerant must be specified at time of order, see note on back on page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE &
- Adaptive defrost
- · Epoxy coated evaporator coil
- Chills glasses and plates at −10°F
















MODEL	GF34HC	
EXTERNAL DIMENSIONAL DATA		
Width Overall	34"	
Depth Overall	26 ½"	
Height Overall	33 5/8"	
Number of Lids	1	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	6.4	
Internal Useable Width Overall (in)	25 %"	
Internal Depth Overall (in)	22"	
Internal Height Overall (in)	18 %"	
Number of Shelves	2	
ELECTRICAL DATA		
Full Load Amperes	3.5	
REFRIGERATION DATA		
Horsepower*	1/2	
Capacity (BTU/Hr)*	1624	
SHIPPING DATA		
Gross Weight - Crated	224 lbs	
Height - Crated	38"	
Width - Crated	52"	
Depth - Crated	30"	

*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

Bar Equipment - Glass Froster

Models: GF34HC

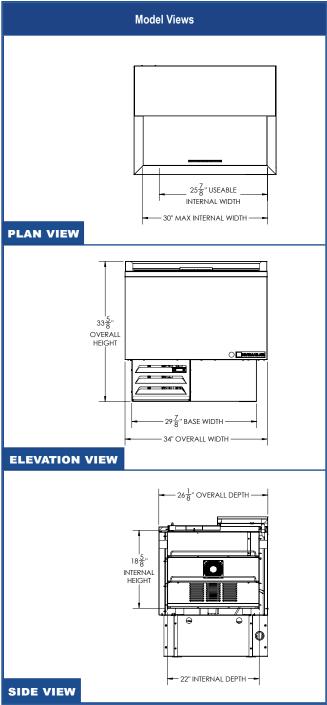















*ELECTRICAL CONNECTION



115/60/1

Units pre-wired at factory NEMA 5-15P and include 8' long cord and plug set.