



ITEM #

Reach-Ins | Refrigerators & Freezers

- EDRR-23-A
- EDRR-49-A
- EDRR-72-A
- EDRR-23-1G-A
- EDRR-49-2G-A
- EDRR-72-3G-A
- EDRF-23-A
- EDRF-49-A
- EDRF-72-A

STANDARD FEATURES

⌘ DURABLE STAINLESS STEEL

Our reach-ins boasts a sturdy stainless steel exterior and interior finish with a galvanized back panel provides strength and durability.

⌘ ERGONOMICALLY DESIGNED DOORS WITH LOCKS

Standard solid doors come with easy grip handles and self closing / 90° stay open door feature, working together for customer convenience.

⌘ MAGNETIC DOOR GASKET

One piece magnetic gasket is removable without tools for ease of cleaning and replacement.

⌘ DIGITAL CONTROLLER

The temperature control system on refrigerators and freezers allows customers to maintain precision temperature control.

⌘ HIGH DENSITY POLYURETHANE INSULATION

Ecomate® 2 inch CFC-free polyurethane insulation foamed in place for extra strength and energy efficiency. Environmentally friendly with zero ozone depletion potential (ODP) and zero global warming potential (GWP).

⌘ EFFICIENT REFRIGERATION SYSTEM

Factory engineered oversized and balanced refrigeration system. CFC-free R-290 for 1 & 2 door refrigerators and R-404 for 3 door refrigerators and all freezers. Refrigerators maintain temperature from 33°F to 38°F and freezers maintain temperature from 0°F to -8°F. Hot gas evaporator in drain pan for efficient condensate evaporation.

⌘ BOTTOM MOUNT COMPRESSOR

Allows easy access with service friendly rails while adding more storage space above. This system provides a cool and clean operating environment enhancing the compressor life.

⌘ ALL BASIC PAN SIZES ACCEPTED, including 18" x 26".

⌘ LED LIGHT & SWIVEL CASTERS

All units come with interior LED light and 4" diameter swivel casters with front brakes.



EDRR(F)-23-A



EDRR(F)-49-A



EDRR(F)-72-A




MODEL	DOORS	CAPACITY (ft)	SHELVES	AMPS	HP	VOLTAGE	NEMA PLUG	CORD LENGTH	CABINET DIMENSIONS			SHIPPING	
									WIDTH	DEPTH	HEIGHT	WEIGHT	CUBES
REFRIGERATORS													
EDRR-23-A	1	23	3	1.8	1/5	115/60/1	5-15P	8'	27 1/2"	32"	84 2/3"	292	47
EDRR-49-A	2	49	6	2.8	1/4	115/60/1	5-15P	8'	55 1/2"	32"	84 2/3"	495	93
EDRR-72-A	3	72	9	11.5	3/4	115/60/1	5-15P	8'	81 7/8"	32"	84 2/3"	675	155
EDRR-23-1G-A	1	23	3	1.8	1/5	115/60/1	5-15P	8'	27 1/2"	32"	84 2/3"	292	47
EDRR-49-2G-A	2	49	6	2.8	1/4	115/60/1	5-15P	8'	55 1/2"	32"	84 2/3"	495	93
EDRR-72-3G-A	3	72	9	11.5	3/4	115/60/1	5-15P	8'	81 7/8"	32"	84 2/3"	675	155
FREEZERS													
EDRF-23-A	1	23	3	8.5	3/4	115/60/1	5-15P	8'	27 1/2"	32"	84 2/3"	315	47
EDRF-49-A	2	49	6	12.9	1	115/60/1	5-15P	8'	55 1/2"	32"	84 2/3"	495	93
EDRF-72-A	3	72	9	14.5	1	115/60/1	5-15P	8'	81 7/8"	32"	84 2/3"	675	155


*Depth does not include 1" rear bumper. **Height does not include 6" overall for casters.




PLAN VIEW Reach-Ins




ED RR(F)-23-A TOP

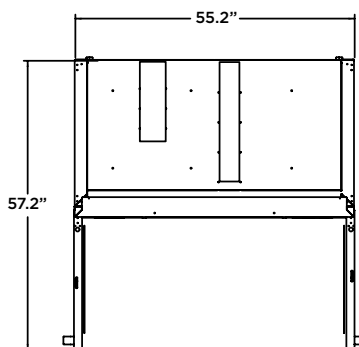


ED RR(F)-49-A TOP

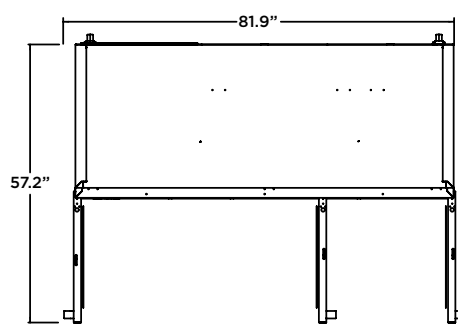


ED RR(F)-72-A TOP

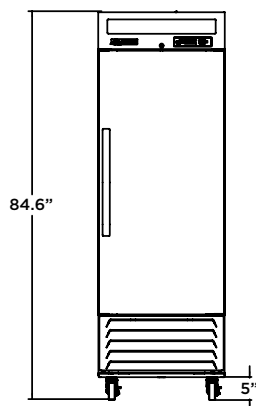


ED RR(F)-23-A FRONT

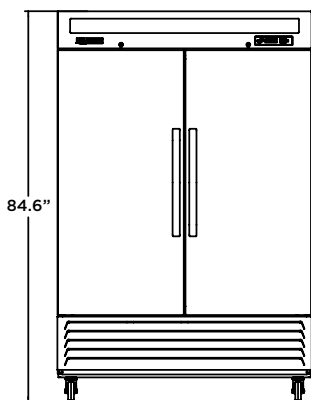

ED RR(F)-49-A FRONT

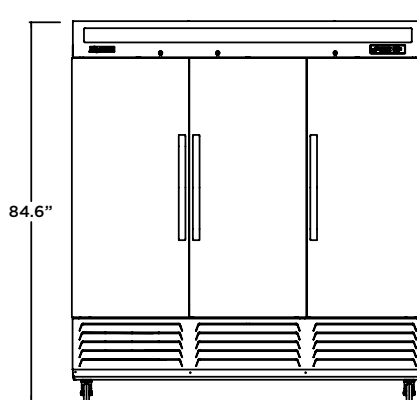

ED RR(F)-72-A FRONT

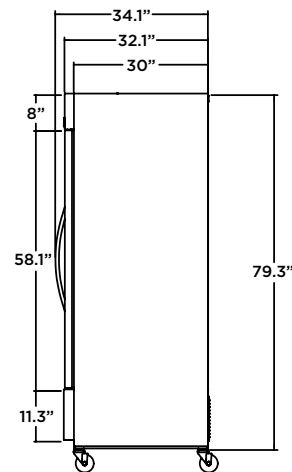

ED RR(F) SIDE



* Specifications



CABINET CONSTRUCTION

- EXTERIOR: Stainless steel, galvanized steel back.
- INTERIOR: Stainless steel.
- CABINET & DOOR: Foamed-in-place high-density, Ecomate® CFC-free, polyurethane insulation. Coved corner floor to meet ETL requirements.
- CASTERS: 4" Diameter swivel casters, front with brakes.
- SHELVES: 3 adjustable heavy duty epoxy coated wire shelves per door.

REFRIGERATION SYSTEM

- Oversized and balanced refrigeration system.
- CFC-free R-290 for refrigerators and R-404 for freezers
- Refrigerators hold temperature from 33 °F to 38 °F and freezers from -8 °F to 0 °F.
- Self contained capillary tube system uses environmentally-friendly refrigerant. (CFC-free).

ELECTRICAL

- The whole unit is completely pre-wired at factory with cord and plug set included and ready for final connection to a 115/60/1 phase.

DOORS

- Stainless steel exterior and interior (except galvanized back panel).
- GASKETS: One piece magnetic gasket is removable without tools for easy cleaning replacement.
- CLOSING SYSTEM: Self-closing doors with 90° stay open feature for convenient loading and unloading.

- Hot gas evaporator in drain pan for efficient condensate evaporation.
- Bottom mount compressor with service friendly rail system.
- Large fan motor and fan blades for better air circulation.
- Self contained system, no plumbing necessary.

WARRANTY

Continental US

- Two year labor and parts warranty.
- Five year compressor warranty.