



ITEM # .....

## Reach-Ins

- EDRR-23-B • EDRR-49-B • EDRR-72-B
- EDRF-23-B • EDRF-49-B • EDRF-72-B

## STANDARD FEATURES

### ⌘ DURABLE STAINLESS STEEL

Our reach-ins boasts a sturdy stainless steel exterior and interior finish with a galvanized back panel provides strength and durability.

### ⌘ ERGONOMICALLY DESIGNED DOORS WITH LOCKS

Standard solid doors come with robust handles and self closing / 90° stay open door feature, working together for customer convenience.

### ⌘ MAGNETIC DOOR GASKET

One piece magnetic gasket is removable without tools for ease of cleaning and replacement.

### ⌘ DIGITAL SMART CONTROLLER

Digital control and display for a more precise temperature reading. Includes door alarm to protect your food from spoilage, self-diagnosis technology and ECO function to save energy through automatic temperature adjustment.

### ⌘ HIGH DENSITY POLYURETHANE INSULATION

Ecomate® 2-3/8" CFC-free polyurethane insulation foamed in place for extra strength and energy efficiency. Environmentally friendly with zero ozone depletion potential (ODP) and zero global warming potential (GWP).

### ⌘ EFFICIENT REFRIGERATION SYSTEM

Factory engineered oversized and balanced refrigeration system. R290 Hydrocarbon. Refrigerators maintain temperature from 33 °F to 38 °F and freezers maintain temperature from 0°F to -8°F. Hot gas evaporator in drain pan for efficient condensate evaporation.

### ⌘ BOTTOM MOUNT COMPRESSOR

Allows easy access with service friendly rails while adding more storage space above. This system provides a cool and clean operating environment enhancing the compressor life.

### ⌘ ALL BASIC PAN SIZES ACCEPTED, including 18" x 26"

### ⌘ LED LIGHT & SWIVEL CASTERS

Solid door units come with interior LED light and all units have 4" diameter swivel casters with front brakes.



EDRR-23-B  
EDRF-23-B



EDRR-49-B  
EDRF-49-B



EDRR-72-B  
EDRF-72-B


## ACCESORIES

Additional epoxy coated shelves.




| MODEL         | DOORS | CAPACITY | SHELVES | AMPS. | HP      | VOLTAGE  | NEMA PLUG | CORD LENGTH | CABINET DIMENSIONS |       |         | SHIPPING |     |
|---------------|-------|----------|---------|-------|---------|----------|-----------|-------------|--------------------|-------|---------|----------|-----|
|               |       |          |         |       |         |          |           |             | WIDTH              | DEPTH | HEIGHT  | WEIGHT   | Ft³ |
| REFRIGERATORS |       |          |         |       |         |          |           |             |                    |       |         |          |     |
| EDRR-23-B     | 1     | 23       | 3       | 2.2   | 1/4     | 115/60/1 | 5-15P     | 8'          | 27 1/2"            | 32"   | 84 2/3" | 292      | 47  |
| EDRR-49-B     | 2     | 49       | 6       | 3.2   | 1/3     | 115/60/1 | 5-15P     | 8'          | 55 ½"              | 32"   | 84 2/3" | 495      | 93  |
| EDRR-72-B     | 3     | 72       | 9       | 7.5   | 3/4     | 115/60/1 | 5-15P     | 8'          | 81 7/8"            | 32"   | 84 2/3" | 675      | 155 |
| FREEZERS      |       |          |         |       |         |          |           |             |                    |       |         |          |     |
| EDRF-23-B     | 1     | 23       | 3       | 4.3   | 1/2     | 115/60/1 | 5-15P     | 8'          | 27 1/2"            | 32"   | 84 2/3" | 315      | 47  |
| EDRF-49-B     | 2     | 49       | 6       | 8.3   | 1       | 115/60/1 | 5-15P     | 8'          | 55 1/2"            | 32"   | 84 2/3" | 495      | 93  |
| EDRF-72-B     | 3     | 72       | 9       | 9.5   | 2 x 1/2 | 115/20/1 | 5-15P     | 8'          | 81 7/8"            | 32"   | 84 2/3" | 675      | 155 |


\*Depth does not include 1" rear bumper. \*\*Height does not include 6" overall for casters.

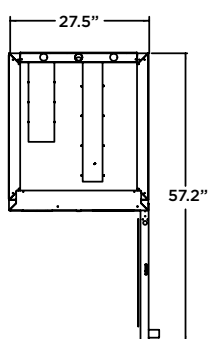


EDJR-23-B TOP  
EDRF-23-B TOP

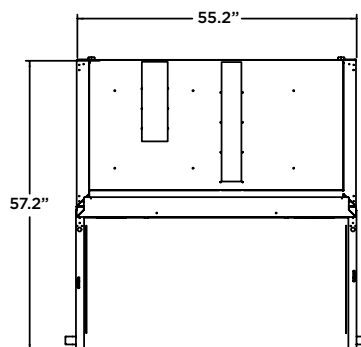


EDJR-49-B TOP  
EDRF-49-B TOP

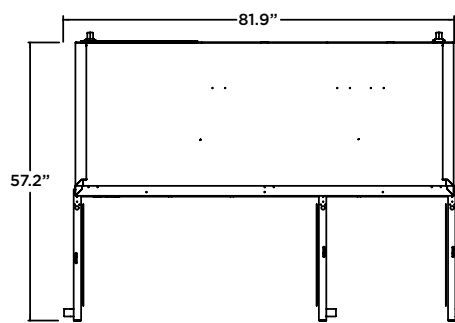


EDJR-72-B TOP  
EDRF-72-B TOP

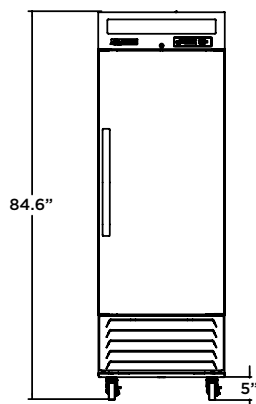


EDJR-23-B FRONT  
EDRF-23-B FRONT

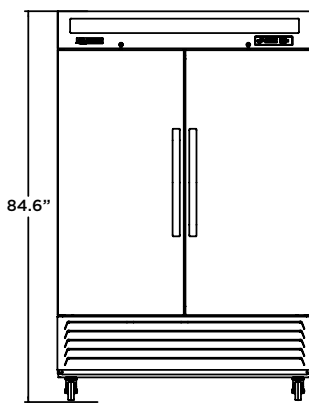

EDJR-49-B FRONT  
EDRF-49-B FRONT

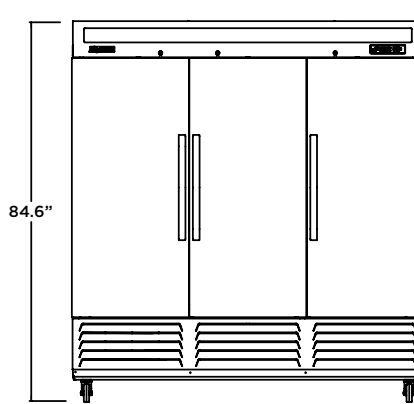

EDJR-72-B FRONT  
EDRF-72-B FRONT

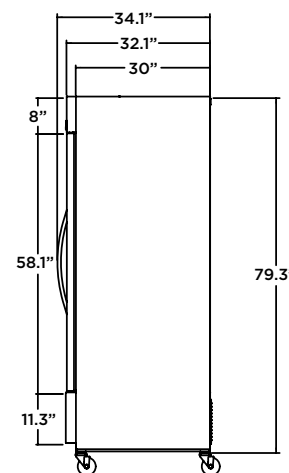

EDJR SIDE  
EDRF SIDE



## \* Specifications



### CABINET CONSTRUCTION

- EXTERIOR: Stainless steel, galvanized steel back.
- INTERIOR: Stainless steel.
- CABINET & DOOR: Entire foamed-in-place high-density, Hydrocarbon, polyurethane insulation. Coved corner floor to meet ETL requirements.
- CASTERS: 5" Diameter swivel casters, front two with brakes.
- SHELVES: Two shelves per door on a rail system that can also accommodate 12"x20" foodservice pans. Pans sold separately.

### REFRIGERATION SYSTEM

- Oversized and balanced refrigeration system.
- R290 holding temperature at 33 °F to 38 °F.
- Self-contained capillary tube system uses environmentally friendly and CFC-free refrigerant.
- Front breathing allows unrestricted placement of the unit.
- Evaporator coil is mounted in the rear of the unit with full accessibility from de back.
- Large fan motor and fan blades for better air circulation.
- Self contained system, no plumbing necessary.
- Acces for the condensing unit behind the front grills slides out for easy cleaning and maintenance.

### DOORS

- Stainless steel exterior.
- One piece magnetic gasket is removable without tools for easy cleaning replacement.
- Self-closing doors with 120° stay open feature and recessed handles for convenient loading and unloading.

### ELECTRICAL

- The whole unit is completely pre-wired at factory with cord and plug set included and ready for final connection to a 115/60/1 phase.

### WARRANTY

Continental US

- Two year labor and parts warranty.
- Five year compressor warranty.