



ITEM #

Salad-Sandwich Tables

- EDST27-8-B
- EDST48-12-B
- EDST60-16-B
- EDST72-18-B

STANDARD FEATURES

⌘ DURABLE STAINLESS STEEL

Our prep tables boast a sturdy stainless steel exterior and interior finish and galvanized back panel providing strength and durability.

⌘ ERGONOMICALLY DESIGNED SOLID DOORS

Standard doors come with easy grip handles and self closing/120° stay open door feature, working together for customer convenience while ABS door liner provides thermal efficiency.

⌘ MAGNETIC DOOR GASKET

One piece magnetic gasket is removable without tools for ease of cleaning and replacement. Door's in step design gives added protection to the gasket.

⌘ EFFICIENT REFRIGERATION SYSTEM

Factory engineered oversized and balanced refrigeration system. R290 Hydrocarbon refrigerators maintain temperature from 33° to 38 °F. Forced air design underneath pans to keep products fresh.

⌘ FRONT BREATHING

Allows unrestricted placement of the unit.

⌘ HIGH DENSITY POLYURETHANE INSULATION

Ecomate® 2" CFC-free polyurethane insulation foamed in place for extra strength and energy efficiency. Environmentally friendly with zero ozone depletion potential (ODP) and zero global warming potential (GWP).

⌘ INSULATED LIDS

Removable insulated lids keep food fresh and cold by reducing condensation.

⌘ REVERSIBLE & EASY CLEAN CUTTING BOARD

The full length removable white polyethylene cutting board provides a comfortable 10" of work space.

⌘ STANDARD WITH FULL SETS OF 1/6th PANS, 4" DEPTH

*Except for the EDST27-8-B: two of the pans are 1/9th size. Units can also accommodate 6" deep pans.



EDST27-8-B



EDST48-12-B



EDST60-16-B



ACCESORIES

Additional epoxy coated shelves.


MODEL	DOORS	TOP PANS	SHELVES	AMPS.	HP	VOLTAGE	NEMA PLUG	CORD LENGTH	CABINET DIMENSIONS			SHIPPING	
									WIDTH	DEPTH	HEIGHT	WEIGHT	Ft ³
REFRIGERATION													
EDST27-8-B	1	8	1	1.5	1/10	115/60/1	5-15P	8'	27"	30"	37"	214	33
EDST48-12-B	2	12	2	2.5	1/3	115/60/1	5-15P	8'	48"	30"	37"	305	55
EDST60-16-B	2	16	2	2.5	1/3	115/60/1	5-15P	8'	60"	30"	37"	370	68
EDST72-18-B	3	18	3	2.5	1/3	115/60/1	5-15P	8'	72"	30"	37"	455	81

*Depth does not include 1" rear bumper. **Height does not include 5" overall for casters.




Salad-Sandwich Tables


EDST27-8-B Top




EDST48-12-B Top




EDST60-16-B Top

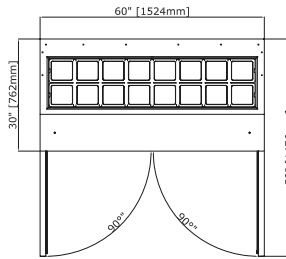


EDST72-18-B Top

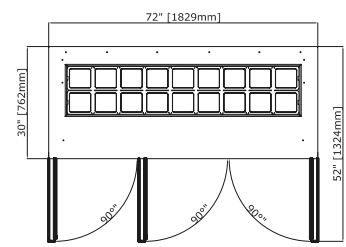


EDST27-8-B Front





EDST48-12-B Front

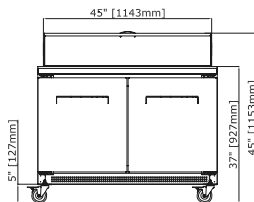

EDST60-16-B Front

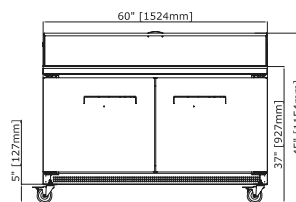

EDST72-18-B Front

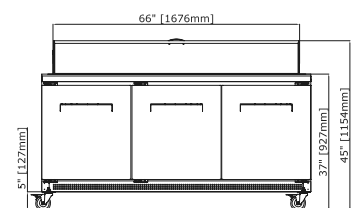

EDST Common View



* Specifications



CABINET CONSTRUCTION

- EXTERIOR: Stainless steel, galvanized steel back.
- INTERIOR: Stainless steel.
- CABINET & DOOR : Entire foamed-in-place high-density, CFC-Free, polyurethane insulation. Coved corner floor to meet ETL requirements.
- CASTERS: 4" Diamenter swivel casters, front two with brakes.

DOORS

- Stainless steel exterior with ABS interior liner.
- One piece magnetic gasket is removable without tools for easy cleaning.
- Self-closing doors with 120° stay open feature and recessed handles for convenient loading and unloading.

REFRIGERATION SYSTEM

- Oversized and balanced refrigeration system.
- R290 holding temperature at 33 °F to 38 °F refrigerators.
- Self-contained capillary tube system uses environmentally friendly and CFC-free refrigerant.
- Front breathing allows unrestricted placement of the unit.
- Evaporator coil is mounted in the rear of the unit with full accessibility from the back.
- Large fan motor and fan blades for better air circulation.
- Self contained system, no plumbing necessary.
- Access for the condensing unit behind the front grill, slides out for easy cleaning maintenance.

ELECTRICAL

- The whole unit is completely pre-wired at factory with cord and plug set included and ready for final connection to a 115/60/1 phase.

WARRANTY

Continental US

- Two year labor and parts warranty.
- Five year compressor warranty.