



ITEM # .....

## Reach-Ins

• EDRR-17-B-HC • EDRF-17-B-HC

### STANDARD FEATURES

**• DURABLE STAINLESS STEEL CONSTRUCTION**

Our Reach-Ins boast a sturdy stainless steel floor, interior and exterior finish. Galvanized back panel providing strength and durability.

**• ERGONOMICALLY DESIGNED DOORS WITH LOCKS**

Solid door with easy grip handles and self closing/120° stay open door feature, working together for customer convenience while stainless steel door liner with 2" polyurethane insulation provides thermal efficiency. Door locks with universal key.

**• COVED CORNERS TO MEET NSF REQUIREMENTS****• MAGNETIC DOOR GASKET**

One piece magnetic gasket is removable without tools for ease of cleaning and replacement.  
Door in-step interior for a better seal and added protection to the gasket.

**• HIGH DENSITY POLYURETHANE INSULATION**

Ecomate® 2-3/8" CFC-free polyurethane insulation foamed in place for extra strength and energy efficiency. Environmentally friendly with zero ozone depletion potential (ODP) and zero global warming potential (GWP).

**• BOTTOM MOUNT COMPRESSOR**

Allows easier access with service friendly rails while adding more storage space above. This system provides a cool and clean operating environment enhancing the compressor life.

**• EFFICIENT REFRIGERATION SYSTEM**

Factory engineered oversized and balanced refrigeration system. R290 Hydrocarbon refrigerator maintains temperature from 32 °F to 40 °F and freezer maintains temperature from 0 °F to -8 °F.

**• DIGITAL CONTROLLER**

Allows to keep the utmost food quality for a longer period of time. Electronic controller with digital display and outcycle for refrigerators. Electric controller with digital display and automatic defrost for freezers.


**• LED LIGHTING****• 3 HEAVY DUTY WIRE SHELVES, EPOXY COATED****• 2.5" DIAMETER SWIVEL CASTERS, FRONT TWO WITH BRAKES****• FIELD REVERSIBLE DOOR**

EDRR-17-B-HC




MODEL	DOORS	CAPACITY		AMPS	HP	VOLTAGE	NEMA PLUG	UNIT DIMENSIONS			SHIPPING	
		Ft³	Shelves*					Width	Depth	Height	Lbs.	Ft³
REFRIGERATOR												
EDRR-17-B-HC	1	17.0	3	2.2	1/4	115/60/1	5-15P	27-5/8"	26-3/4"	77-1/8	240	37
FREEZER												
EDRF-17-B-HC	1	17.0	3	4.3	1/2	115/60/1	5-15P	27-5/8"	26-3/4"	77-1/8	240	37


\*(3) Shelves included. | Depth does not include door handle. | Height includes casters. | Specifications are subject to change without notice.

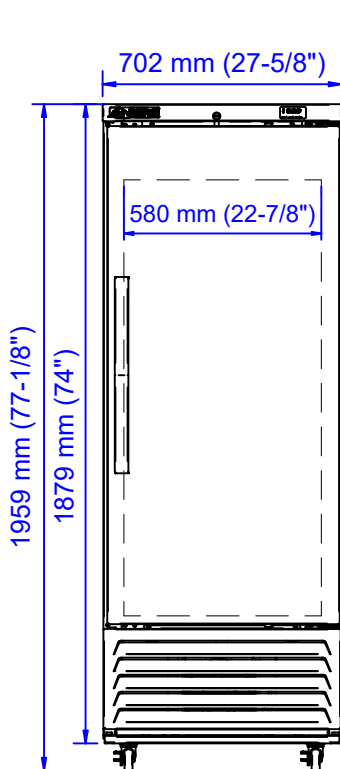

EDJR-17-B-HC FRONT

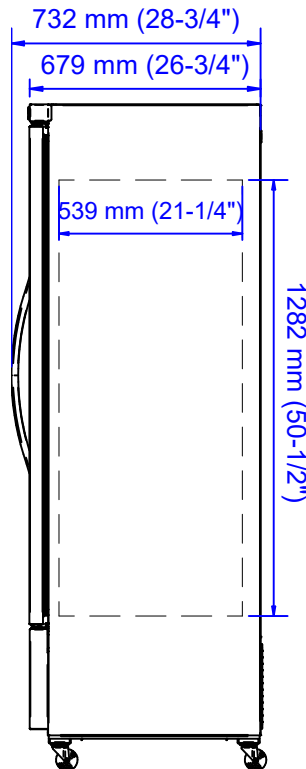

EDJR-17-B-HC SIDE

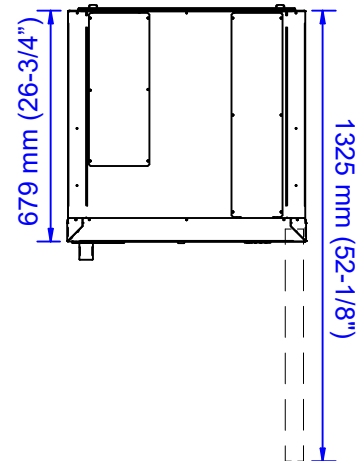

EDJR-17-B-HC TOP



## \* Specifications



### CABINET CONSTRUCTION

- Sturdy stainless steel floor, interior and exterior finish with a galvanized back panel, providing strength and durability.
- CABINET & DOOR : Entire foamed-in-place high-density, 2-3/8" CFC-Free polyurethane insulation.
- Coved corner floor to meet NSF requirements.
- Led lighting.
- CASTERS: 2.5" diameter swivel casters, front two with brakes.
- SHELVES: 3 adjustable heavy duty coated wire shelves.

### REFRIGERATION SYSTEM

- Oversized and balanced refrigeration system.
- R290 environmentally friendly hydrocarbon refrigerant.
- Temperature from 32 °F to 40 °F on refrigerators and from 0 °F to -8 °F on freezers.
- Bottom mount compressor allows easier access with service friendly rails while adding more storage space above.
- Electronic controller with digital display and outcycle for refrigerators.
- Electric controller with digital display and automatic defrost for freezers.
- Large fan motor and fan blades for better air circulation.
- Self contained system, no plumbing necessary.
- Access for the condensing unit from the front and rear side, slides out for easy cleaning maintenance.

### DOORS

- Stainless steel exterior and interior door liner with 2" polyurethane insulation.
- One piece construction magnetic gasket is removable without tools for easy cleaning.
- CLOSING SYSTEM: Self-closing doors with 120° stay open feature and recessed handles for convenient loading and unloading.

### ELECTRICAL

- The whole unit is completely pre-wired at factory with 10' cord and plug set included and ready for final connection to a 115/60/1 phase.

### WARRANTY

Continental US

- **Two year** labor and parts warranty.
- **Five year** compressor warranty.