

## Mega-Top Prep Tables

• EDMT-27-12-B-HC

• EDMT-48-18-B-HC

• EDMT-60-24-B-HC

• EDMT-72-30-B-HC

### STANDARD FEATURES

#### • DURABLE STAINLESS STEEL CONSTRUCTION

Our Prep Tables boast a sturdy stainless steel exterior and interior finish, with a galvanized back panel providing strength and durability.

#### • ERGONOMICALLY DESIGNED SOLID DOORS

Standard doors come with easy grip handles and self closing/120° stay open door feature, working together for customer convenience while stainless steel door liner with 2" polyurethane insulation provides thermal efficiency.

#### • CABINET WITH COVED CORNERS TO MEET NSF REQUIREMENTS

#### • MAGNETIC DOOR GASKET

One piece magnetic gasket is removable without tools for ease of cleaning and replacement.

Door in-step interior for a better seal and added protection to the gasket.

#### • HIGH DENSITY POLYURETHANE INSULATION

Ecomate® 2" CFC-free polyurethane insulation foamed in place for extra strength and energy efficiency. Environmentally friendly with zero ozone depletion potential (ODP) and zero global warming potential (GWP).

#### • INSULATED LIDS

Removable insulated lids keep food fresh and cold by reducing condensation.

#### • EFFICIENT REFRIGERATION SYSTEM

Factory engineered oversized and balanced refrigeration system.

R290 Hydrocarbon refrigerators maintain temperature from 32 °F to 40 °F in the storage cabinet; and 32 °F to 41 °F in the pans zone.

Forced air design underneath pans to keep products fresh.

#### • ELECTRONIC THERMOSTAT FOR TEMPERATURE CONTROL

#### • REVERSIBLE & EASY CLEAN CUTTING BOARD

The full length removable white polyethylene cutting board provides a comfortable 10" of workspace.

#### • STANDARD WITH FULL SETS OF 1/6th PANS, 4" DEPTH

\*Except for EDMT-27-12 BERG HC: three of the pans are 1/9th size.

Units can also accommodate 6" deep pans.

#### • 1 HEAVY DUTY WIRE SHELF PER DOOR, EPOXY COATED

#### • 5" DIAMETER SWIVEL CASTERS, FRONT TWO WITH BRAKES

#### • FIELD REVERSIBLE DOOR ON SINGLE DOOR UNITS



EDMT-27-12-B-HC



EDMT-48-18-B-HC




EDMT-60-24-B-HC




MODEL	DOORS	CAPACITY			AMPS	HP	VOLTAGE	NEMA PLUG	UNIT DIMENSIONS			SHIPPING	
		Ft³	Top Pans	Shelves*					Width	Depth	Height	Lbs.	Ft³
EDMT-27-12-B-HC	1	6.9	12	2	1.5	1/10	115/60/1	5-15P	27-7/8"	36-3/8"	50-5/8"	225	27.9
EDMT-48-18-B-HC	2	13.3	18	4	2.5	1/4	115/60/1	5-15P	48-3/4"	36-3/8"	50-5/8"	327	46.6
EDMT-60-24-B-HC	2	16.8	24	4	2.5	1/4	115/60/1	5-15P	60-7/8"	36-3/8"	50-5/8"	380	57.2
EDMT-72-30-B-HC	3	20.6	30	6	2.5	1/4	115/60/1	5-15P	72-3/4"	36-3/8"	50-5/8"	465	68.2

\*(1) Shelf included per door. | Depth does not include rear spacers. | Height includes open lids and casters. | Specifications are subject to change without notice.


EDMT-27-12-B-HC

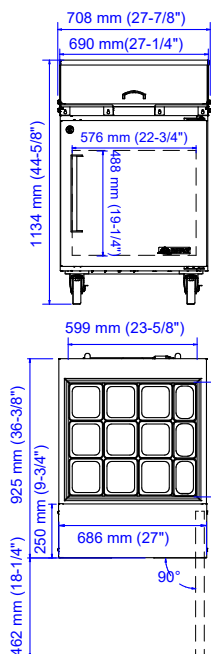



EDMT-48-18-B-HC

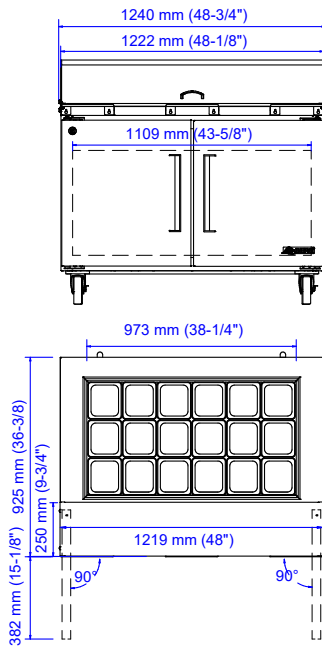

EDMT-60-24-B-HC

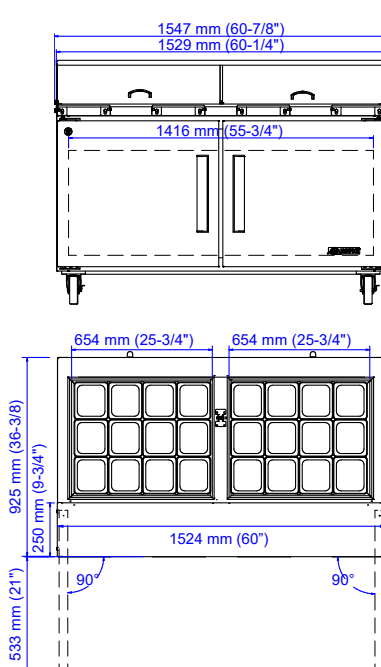

EDMT-72-30-B-HC

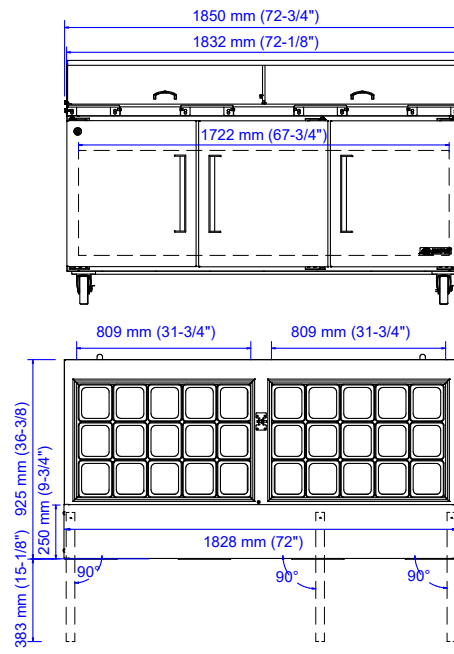

COMMON SIDE VIEW



## \* Specifications



### CABINET CONSTRUCTION

- Sturdy stainless steel exterior and interior finish with a galvanized back panel.
- CABINET & DOOR : Entire foamed-in-place high-density, 2" CFC-Free polyurethane insulation.
- Coved corner floor to meet NSF requirements.
- CASTERS: 5" diameter swivel casters, front two with brakes.
- SHELVES: 1 adjustable heavy duty coated wire shelf per door.

### REFRIGERATION SYSTEM

- Oversized and balanced refrigeration system.
- R290 environmentally friendly hydrocarbon refrigerant.
- Temperature from 32 °F to 40 °F on storage cabinet and from 32 °F to 41 °F on pans zone.
- Evaporator coil is mounted in the rear side of the unit with full accessibility from the storage cabinet.
- Electronic thermostat for temperature control.
- Large fan motor and fan blades for better air circulation.
- Self contained system, no plumbing necessary.
- Access for the condensing unit from the rear side, slides out for easy cleaning maintenance.

### DOORS

- Stainless steel exterior and interior door liner with 2" polyurethane insulation.
- One piece magnetic gasket is removable without tools for easy cleaning.
- Self-closing doors with 120° stay open feature and recessed handles for convenient loading and unloading.

### ELECTRICAL

- The whole unit is completely pre-wired at factory with 10' cord and plug set included and ready for final connection to a 115/60/1 phase.

### WARRANTY

Continental US

- **Two year** labor and parts warranty.
- **Five year** compressor warranty.