

4184 E. Conant St. Long Beach, CA 90808 Tel. 310-900-1000 Fax. 310-900-1077 www.turboairinc.com

Project :	
Model # :	
Item # :	Qty:
Available W/H :	
Approval :	

Solid Door Heated Cabinet

Reach-In PRO Series

Model: PRO-77H

___ FEATURES & BENEFITS =__

■ Digital temperature control & monitor system

- Keep food products safe by maintaining constant temperatures.
- · Alarm beeps when doors are not sealed.
- Early warning alarm program detects issues before malfunction occurs.
- · Digital display allows for easy monitoring.
- · Sensitive touch display.

■ Ducted fan air distribution system

Maintains temperature within the food zone

On/Off switch

ON/OFF switch is located on control panel

■ All stainless steel cabinet construction

The PRO series model boasts a stainless steel interior and a 22 gauge stainless steel exterior (galvanized steel top, bottom). It guarantees the utmost in cleanliness and long product life. The PRO series model adds a touch of style to the most refined setting.

■ Sturdy, clean stainless steel shelving

Shelves are the most important part of cleanliness as they come in direct contact with food. After a while, PVC coated wire shelves may peel, rust and lead to unsanitary conditions. Only the Turbo Air PRO series uniquely provides stainless steel shelving.

■ LED interior lighting

■ High-density polyurethane insulation

The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.

- Full length stainless steel solid doors with locks
- Self-closing doors with stay open feature at 120 degrees
- Heated cabinet holds 140°F ~ 180°F for the best in food preservation
- Lifetime guaranteed heavy duty hinges and handles














(unit: inch)

Solid Door Heated Cabinet

Model: PRO-77H

ELECTRICAL DATA	
Voltage	208/115/60/1
Plug Type	③ NEMA L14-20P
Full Load Amperes	15
Wattage (W)	3000
Feed Wires with Ground	4
Cord Length (ft.)	8
DIMENSIONAL DATA	
# of Doors	3
# of Racks Accepted	3
Net Capacity (cu. ft.)	73.9
Ext. Length Overall (in.)	77 _{3/4} (1976mm)
Ext. Depth Overall (in.)*	337/8 (860mm)
Ext. Height Overall (in.)†	78 (1982mm)
Int. Length Overall (in.)	681/4 (1735mm)
Int. Depth Overall (in.)	275/8 (702mm)
Int. Height Overall (in.)	583/4 (1493mm)
# of Shelves	9
Shelf Size (L x D) (in.)	23 x 25 _{1/4} (Left/Right)
	251/4 x 251/4 (Middle)
Net Weight (lbs.)	627
Gross Weight (lbs.)	695

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

WARRANTY: 3 Year Parts and Labor Warranty


STANDARD FEATURES


- Door locks standard
- Standard 4" dia. swivel casters with locks on the front set
- · Easy replaceable one piece magnetic door gaskets
- · Solid and sturdy grille design

OPTIONAL ACCESSORIES

- 5" caster, 1/2" diameter & 13 TPI: M726500100 (non-brake), M726500200 (w/ brake)
- 4.7" leveling seismic leg (1/2", 13 TPI): 30221M0500
- 6" stainless steel leg: 30221M0600
- · Additional stainless steel shelf: (L, R) H50R901700, (M) H77R801710
- Half door bun tray rack: TSP-2224 (each holds up to six 18"L x 26"D sheet pans-sold separately)
- Full door bun tray rack: TSP-2250 (each holds up to fifteen 18"L x 26"D sheet pans)
- Tray slides kits: TS23-N1LR(#1), TS23-N4LR(#4), TS23-UNLR-H(Universal), TS3-N1C(#1), TS3-N4C(#4), TS3-UNC-H(Universal)

PLAN VIEW

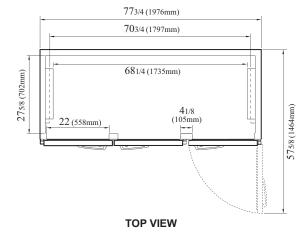

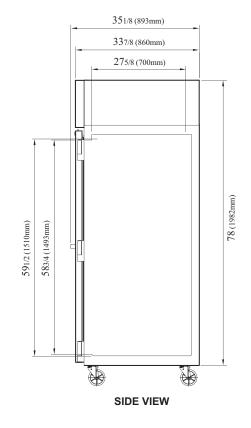

Ver.20191115









lurbo air











■ **AC**: 888-900-1002

^{*} Depth does not include 1-1/4" for door handles.

[†] Height does not include 5" for caster height.