

4184 E. Conant St.
Long Beach, CA 90808
Tel. 310-900-1000
Fax. 310-900-1077
www.turboairinc.com

Project :	
Model # :	
Item # :	Qty :
Available W/H :	

Approval :

Roll-In Solid Door Heated Cabinet

PRO Series

____ FEATURES & BENEFITS ____

Digital temperature control & monitor system

- Keep food products safe by maintaining constant temperatures. • Alarm beeps when doors are not sealed.
- · Early warning alarm program detects issues before malfunction occurs.
- Digital display allows for easy monitoring.
- · Sensitive touch display.
- Ducted fan air distribution system

Maintains temperature within the food zone

On/Off switch

ON/OFF switch is located on control panel

All stainless steel cabinet construction

The PRO series model boasts a stainless steel interior and a 22 gauge stainless steel exterior (galvanized steel top, bottom). It guarantees the utmost in cleanliness and long product life. The PRO series model adds a touch of style to the most refined setting.

Sturdy, clean stainless steel shelving

Shelves are the most important part of cleanliness as they come in direct contact with food. After a while, PVC coated wire shelves may peel, rust and lead to unsanitary conditions. Only the Turbo Air PRO series uniquely provides stainless steel shelving.

- LED interior lighting
- High-density polyurethane insulation The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.
- Full length stainless steel solid doors with locks
- Self-closing doors with stay open feature at 120 degrees
- Heated cabinet holds 140°F ~ 180°F for the best in food preservation
- Lifetime guaranteed heavy duty hinges and handles
- PRO-26H-RI: Right hinged, 115V
- PRO-26H-RI-L: Left hinged, 115V
- PRO-26H2-RI: Right hinged, 208V
- PRO-26H2-RI-L: Left hinged, 208V



Model	Swing Door	CU./FT.	#of Rack Accepted	Wattage (W)	AMPS	Crated Weight (lbs.)	L x D [*] x H [†] (inches)
PRO-26H-RI(-L) PRO-26H2-RI(-L)	1	39.3	1	1550	13.5 7.5	355	34 x 373/4 x 841/4

Ver 20191115

* Depth does not include 1-1/4" for door handles. Depth does not include 5-1/2" for ramp.

Roll-In

PRO-26H2-RI(-L)

Model: PRO-26H-RI(-L)

0

Roll-In Solid Door Heated Cabinet

Model : PRO-26H-RI(-L) PRO-26H2-RI(-L)

ELECTRICAL DATA	PRO-26H-RI(-L)	PRO-26H2-RI(-L)			
Voltage	115/60/1	208/115/60/1			
Plug Type	() NEMA 5-15P	ONEMA L14-20P			
Full Load Amperes	13.5	7.5			
Wattage (W)	1550	1550			
Feed Wires with Ground	3	4			
Cord Length (ft.)	8	8			
DIMENSIONAL DATA					
# of Doors	1	1			
# of Racks Accepted	1	1			
Net Capacity (cu. ft.)	39.3	39.3			
Ext. Length Overall (in.)	34 (865mm)	34 (865mm)			
Ext. Depth Overall (in.)	373/4 (960mm)	373/4 (960mm)			
Ext. Height Overall (in.)*	841/4 (2140mm)	841/4 (2140mm)			
Int. Length Overall (in.)	273/8 (694mm)	273/8 (694mm)			
Int. Depth Overall (in.)	311/2 (800mm)	311/2 (800mm)			
Int. Height Overall (in.)	667/8 (1699mm)	667/8 (1699mm)			
Rack Size (L x D x H) (in.)	27 x 29 x 66	27 x 29 x 66			
Net Weight (lbs.)	325	325			
Gross Weight (lbs.)	355	355			
Design and specifications subject to change without notice.					

Actual shipping weight may differ due to extra packing materials for product protection. * Depth does not include 1-1/4" for door handles. Depth does not include 5-1/2" for ramp.

WARRANTY: 3 Year Parts and Labor Warranty


• Heavy duty stainless steel ramp standard


STANDARD FEATURES
Door locks standard

• Solid and sturdy grille design

PLAN VIEW

(unit : inch)

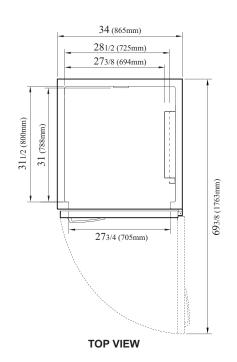

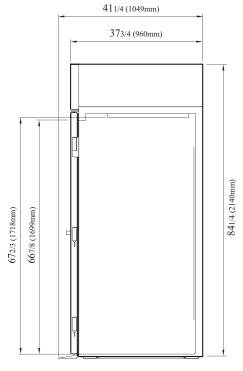

SIDE VIEW

Turbo air Texaking

GK: 800-500-3519

AC : 888-900-1002

Turbo Air : 800-627-0032

Warranty : 800-381-7770

Ver.20191115

Intertek Intertek

Turbo air

(GERMAN)

KNIFE)