

4184 E. Conant St.
Long Beach, CA 90808
Tel. 310-900-1000
Fax. 310-900-1077
www.turboairinc.com

D ' '	
Project	

Model # : Item # :

Available W/H :

Approval :

Sandwich & Cheese Display Cases

Open Display Merchandisers

Qty :

Patented Self-Cleaning Condenser



Model : TOS-50NN-W(B)



____ FEATURES & BENEFITS =___

Self-Cleaning Condenser

The accumulation of dust in the condenser can cause the failure or breakdown of refrigerators. Refrigerators run normally until they reach a certain level of accumulation. At some point, when they are over the limit, their performance drops quickly resulting in damage to, or disposal of the stored products inside. The Self-Cleaning Condenser device keeps the condenser clean and prevents system failure by automatically brushing daily.

Hydrocarbon refrigerants (R-290)

With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

- High-density polyurethane insulation The entire cabinet structure is foamed-in-place using high density, CFC free polyurethane insulation.
- Exterior and bottom glass shelf is white (black) with a mirror finish
- Digital temperature controller
- Single pane glass is tempered for safety
- Stainless steel airflow grille
- Self-contained system, no plumbing required

NATURALØ Refrigerant					
Model	CU./FT.	HP	AMPS	Crated Weight (lbs.)	$L \ge D \ge H^*$ (inches)
TOS-50NN-W(B)	4.2	1/3	8	640	50 x 353/8 x 307/8

* Height does not include 2-1/4" for caster height.

0

Sandwich & Cheese Display Cases

Model : TOS-50NN-W(B)

ELECTRICAL DATA					
Voltage	115/60/1				
Plug Type	(i) NEMA 5-15P				
Full Load Amperes	8				
Compressor HP	1/3				
Cord Length (in.)	81/4				
Refrigerant	R-290				
DIMENSIONAL DATA					
Net Capacity (cu. ft.)	4.2				
Ext. Length Overall (in.)	50 (1270mm)				
Ext. Depth Overall (in.)	353/8 (900mm)				
Ext. Height Overall (in.)*	307/8 (783mm)				
Int. Length Overall (in.)	451/2 (1155mm)				
Int. Depth Overall (in.)	251/4 (641mm)				
Int. Height Overall (in.)	61/2 (164mm)				
Int. Height Load limit (in.)	31/2 (90mm)				
Net Weight (Ibs.)	441				
Gross Weight (lbs.)	640				

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

* Height does not include 2-1/4" for caster height.

• WARRANTY : ² Year Parts and Labor Warranty Additional 3 Year Warranty on Compressor

STANDARD FEATURES


• White and black color come standard

• 3" dia. swivel casters with locks on the rear set

** Lead time applies. Please contact your sales representative for more details to order.

Recommended operating conditions

TOS models are designed to operate in an environment where temperature & humidity do not exceed $75^{\circ}F$ and 55% respectively.

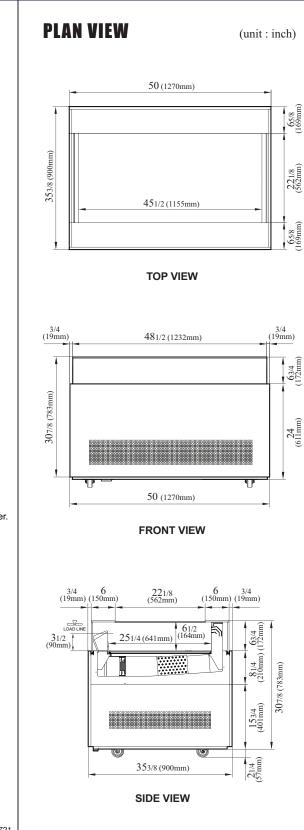

Ver.20200721

Turbo Air : 800-627-0032
GK : 800-500-3519
Warranty : 800-381-7770
AC : 888-900-1002

.(T). (T)

2 YEAR

5 YEAR WARRANTY

NATURAL Refrigerant



