



Project Name: _____

Location: _____

Item #: _____ Qty: _____

Model: _____

4-SIDED COUNTERTOP GLASS DOOR MERCHANDISERS

MODEL: ☐ RT-78L ☐ RT-78L(2R)



RT-78L



RT-78L(2R)

Berg's Cold Countertop Glass Door Merchandisers are designed to provide the user with maximum storage, energy savings and cold, accurate temperatures. Our countertop models allow for easy accessibility, optimum capacity and flexibility for quick and efficient food product presentation.

FEATURES AND CONSTRUCTION

- Durable, corrosion resistant black painted steel and stainless steel exterior with black plastic trim
- Easy to clean, low maintenance ABS interior
- Dual pane tempered glass doors and sides prevent heat loss and minimize condensation
- Interior LED lighting
- Digital controls deliver precise temperature regulation
- Internal bottom mounted compressor with flow through ventilation to cool the utility compartment
- Manual defrost cycle maintains ideal storage conditions
- Internal condensate evaporator pan included, so no drain connection is needed
- Flat top accommodates POP or other marketing displays
- Three (3) heavy-duty, adjustable chrome-plated wire shelves
- 2" legs (two front adjustable leveling legs)

NOMINAL STORAGE CAPACITY

RT-78L/(2R)..... 3 Cu Ft (85 L)


TEMPERATURE

Holding temperature 33°F to 54°F (1°C to 12°C)

- Temperature can be displayed in Celsius or Fahrenheit

ELECTRIC

115V / 60Hz / 1Ph
(230V / 50-60Hz / 1Ph is available as an option)
6' (2m) NEMA 5-15P cord set included



NEMA 5-15P

3RD PARTY APPROVALS



Intertek

Certified to ANSI NSF 7



Intertek

Certified to ANSI UL 471



DOE 2017 Compliant

WARRANTY

1-Year limited replacement warranty

To obtain warranty service, call 888-585-9440



BERG


4-SIDED COUNTERTOP GLASS DOOR MERCHANDISERS

RT-78L

RT-78L(2R)


FRONT VIEW

TOP VIEW

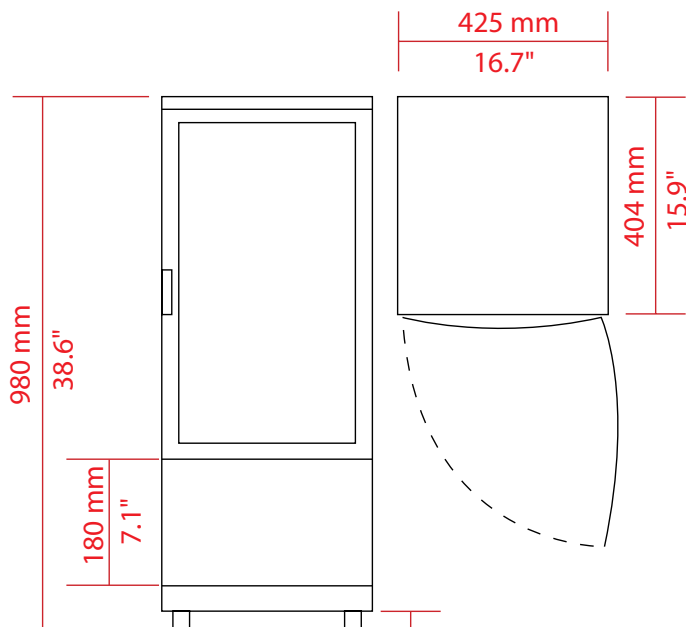

FRONT VIEW

TOP VIEW

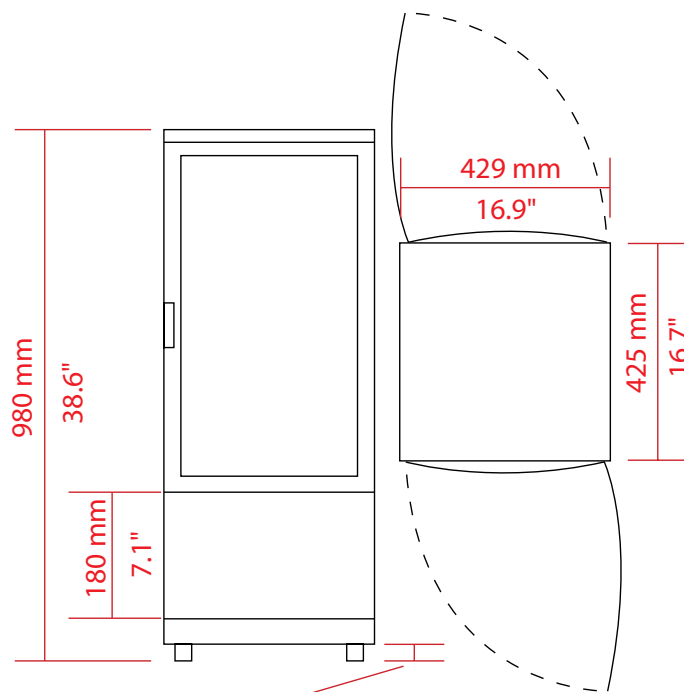

38 mm
1.5"

MODEL	EXTERNAL DIMENSIONS	NOMINAL CAPACITY	HOLDING TEMPERATURE RANGE	AMP DRAW	SHIPPING WEIGHT	REFRIGERANT AND CHARGE SIZE	DOORS / SHELVES	ELECTRICAL
RT-78L	16.7" x 15.9" x 38.6" (425 x 404 x 980 mm)	3 Cu Ft (85 L)	33°F to 54°F (1°C to 12°C)	2.0A	84.9 lbs (38.5 kg)	R-290A 1.41 oz (40 g)	1 / 3	115V / 60Hz / 1Ph
RT-78L(2R)	16.7" x 15.9" x 38.6" (425 x 404 x 980 mm)	3 Cu Ft (85 L)	33°F to 54°F (1°C to 12°C)	2.0A	86 lbs (39 kg)	R-290A 1.41 oz (40 g)	2 / 3	115V / 60Hz / 1Ph

INSTALLATION

- Recommended minimal side clearance for each door is 18". For closed sides, recommended clearance is 3".
- Optional 6" leveling legs are available for floor-mounted applications

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this document are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.