

Chest Freezer Solid Top Chest Freezer 38 " Long

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____



738089 (KCCF073WS)

Solid Top Chest Freezer 38
" Long

Short Form Specification

Item No. _____

Solid top chest freezer with foamed lid and soft closing mechanism to ensure gentle lid closure. Internal and external structure in white painted steel. Basket, vertical basket divider, NSF thermometer and lock included as standard. Defrost water drain with plug for easy cleaning.

R600a refrigerant gas for the lowest environmental impact (GWP=3).

The temperature range is -15° to 10°F.

ETL safety and sanitation listed for US and Canada.

Equipped with NEMA 5-15P plug.

Main Features


- Static Condenser
- 1/6 HP Compressor
- Mechanical Control
- Internal Temperature Display
- Freezer Basket
- Locking Lids & Key Protect the contents of the unit
- Energy Star certified
- Exterior Finish: Textured Painted Steel
- Interior Finish: Painted Steel
- Basket - Durable and reliable for safety in food storage (1 basket included).
- ETL®-Certified Temperature Gauge - Durable and reliable for safety in food storage.
- Heavy-Duty, Locking Casters - Keeps unit in place but allows position adjusting.

Optional Accessories


- BASKET FOR SOLID TOP 7 CU FT CHEST FREEZER 413X220X428 MM PNC 882002 ☐

APPROVAL: _____

Front

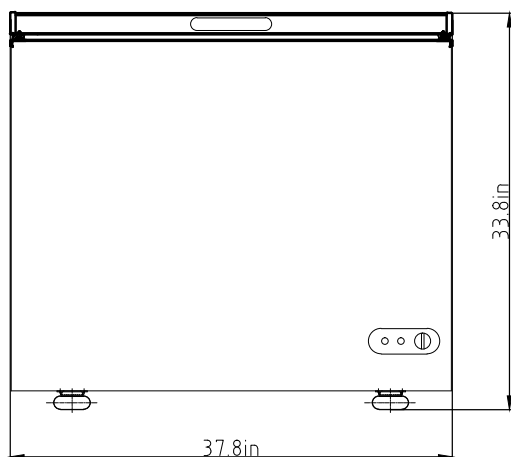

Side

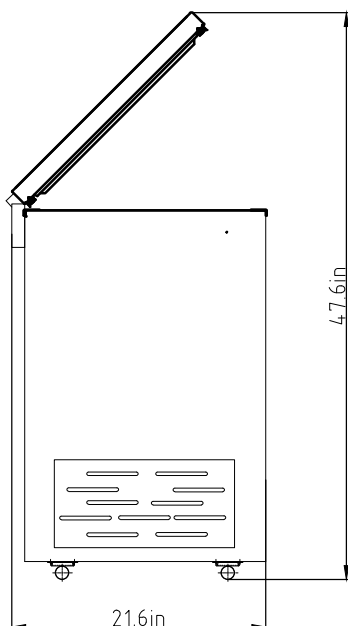

El = Electrical connection

Electric

Supply voltage:

738089 (KCCF073WS)

115 V/1 ph/60 Hz

Electrical power, max:

0.1 kW

Plug type:

USA NEMA 5-15P

Key Information:

External dimensions, Width: 37 13/16" (960 mm)

External dimensions, Depth: 22 1/8" (562 mm)

External dimensions, Height: 32 11/16" (830 mm)

Internal dimensions, Width: 32 1/16" (814 mm)

Internal dimensions, Height: 27 1/4" (692 mm)

Internal dimensions, Depth: 14 7/8" (378mm)

Net weight: 60 lbs (27.27 kg)

Shipping width: 23 1/32" (585 mm)

Shipping height: 34 13/16" (885 mm)

Shipping weight: 100 lbs (45.36 kg)

Shipping volume: 18.37 ft³ (0.52 m³)

Refrigeration Data

Refrigerant type:

R600a