



Argus gas ranges are constructed of a stainless steel front, backriser, shelf and legs with galvanized sides. Each 30,000 BTU burner has its own 12"x12" removable cast iron grate with a standing pilot light and individual control knob for quick, instant lighting. The standard oven has a total BTU output of 30,000 BTU. The interior of the oven is constructed of all steel with a porcelain oven liner on the bottom. The oven thermostat adjusts from 200°F- 500°F and is equipped with a flame failure safety device.



This item meets the sanitation standards imposed by the ETL, a division of the Intertek Group.





This item meets the electrical product safety standards imposed by the ETL, a division of the Intertek Group, for use in the United States and Canada.



HFS0-60

## **Plan Views**

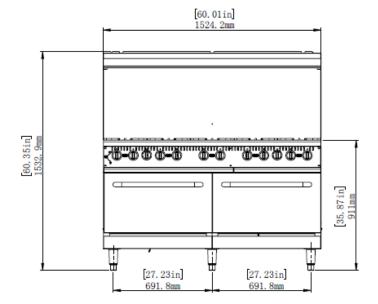



## **Features**

- Ten cast iron burners
- Standard oven bases
- Thermal coupling safety valve for the oven
- Cool to touch stainless steel oven door handle
- · Individual pilot light for each burner
- Two oven racks per oven
- 6" Adjustable stainless steel legs
- Natural gas ready
- 3/4" rear NPT gas connection
- · Removable crumb tray for easy cleaning
- Ships Natural gas ready with a LPG conversion kit

## **Specifications**

opecifications -	
Model Number	HFSO-60
Total BTU	360,000 BTU
Oven / Burner BTU	30,000 BTU
Burners	10
Number of Ovens	2
Oven Racks	2 Per oven
Temperature Range	200°F-500°F
Net Weight (lbs.)	671 lbs
Gross Weight (lbs.)	759 lbs
Overall Dimensions	60"W x 33-5/8"D x 60-3/8"H