



| | |
|---------------|------|
| Project Name: | |
| Location: | |
| Item: | Qty: |
| Model: | |

BVER23

ECONOMY REACH-IN REFRIGERATOR



BVER23

FEATURES

Berg's 23 cubic foot (nominal), 18 Cu Ft (actual storage volume) one-door reach-in refrigerators have 3 adjustable shelves and digital temperature control. The digital temperature display is prominently displayed above the door for easy viewing. Berg refrigerators and freezers are designed to meet the requirements of the most discriminating customer.

- Textured, gray, durable finish
- Painted steel exterior and painted aluminum interior is rugged, easily cleaned, low maintenance and an excellent value
- Easy to use and set digital controller for easy operation
- Worry-free reliable operation
- Single heavy duty handle and door for added durability
- 2.5" diameter swivel casters come standard (3.5" overall plate caster height)
- 2 of the casters lock, so the upright will stay in place once it is rolled into position
- Door locks come standard
- Bottom-mounted oversized compressor
- Door-frame heaters standard
- Snap-in gaskets are removable for cleaning or replacement
- 115V/60Hz and 220V/50Hz electrical service availability
- Uses environmentally friendly non-CFC R134a refrigerant
- Commercially designed, tested and listed as compliant to ANSI NSF7 and ANSI UL 471 standards

BVER23

| | | |
|---|---------------------------------------|------------------------------|
|   | | |
| | Approvals: UL, UL sanitation approved | REV 4/16 W Printed in USA |



BVER23


ECONOMY REACH-IN REFRIGERATOR

DIMENSIONS

TOP VIEW

FRONT VIEW

SIDE VIEW

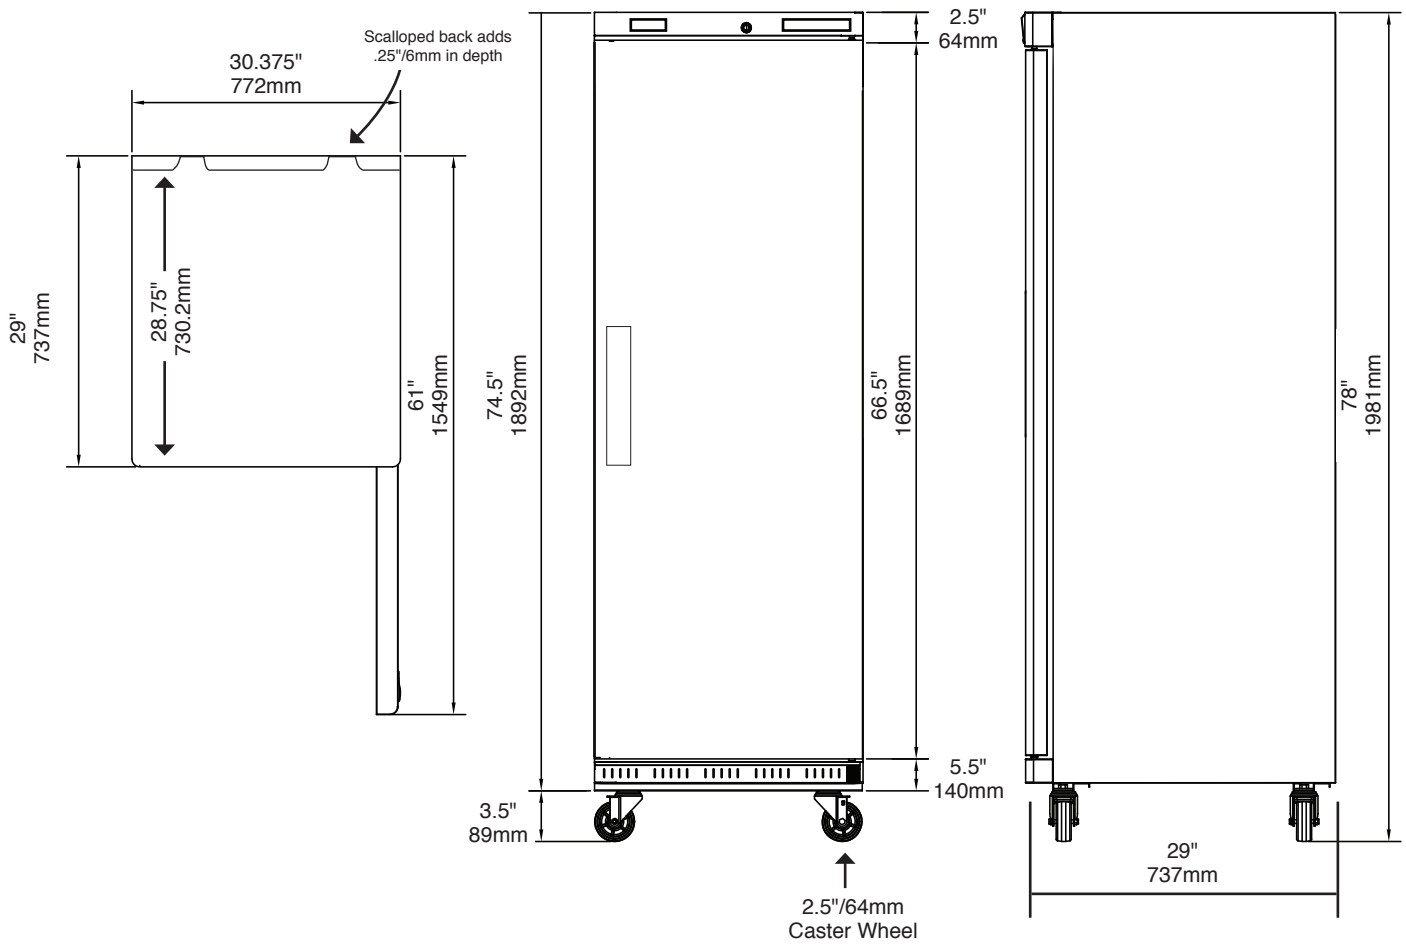

| Model | Dim (W"xD"xH") | Capacity | Temp | Power | Doors | Weight | Shelves |
|---------------------|--|---|---------------------------|--|-------|------------------|---|
| BVER23 Refrigerator | 30.375 x 29 x 78 772 x 737 x 1981mm | Nominal 23 Cu Ft (651 L) Actual 18.5 Cu Ft (524 L) | 28° to 46°F -2° to 8°C | 460 watt 115V - 4 Amps 220V - 2.1 Amps | 1 | 231 lb 105 kg | 4 Total (3 adjustable, 1 half size fixed) |