

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

TOP MOUNTED CROSS-TEMP®

MODEL: CT1HC-1G

CT1HC Glass Door Variable Speed Freezer/Refrigerator Hydrocarbon Series



3 Year Parts/Labor Warranty Additional 4 Year Compressor Warranty

CABINET CONSTRUCTION

- Exterior is stainless steel front with continuous coil coated sides
- Interior liner is made of corrosion resistant aluminum
- Expansion valve technology
- · Easily converts from refrigerator to freezer
- Single cabinet configurable to all menu initiatives, temperature range of -15 to 40° F
- · Modulates coil temp to achieve desired set point
- Intuitive compressor
- Variable speed compressor technology achieve 30% more energy efficiency
- Quicker pull-down
- · Improved product stability
- · Rapid recovery defrost
- Three (3) epoxy coated shelves
- 6" Casters with (2) brakes

OPTIONS & ACCESSORIES

- · Stainless steel exterior
- Stainless steel interior
- Stainless steel tray (A)
- Stainless steel
- Universal tray slide (AC)
- Epoxy coated wire rod tray slide (Kit #4)
- Door lock
- Additional shelves
- · Left hand hinged
- 3" Casters
- 6" flanged legs

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE &
- Adaptive defrost
- · Epoxy coated evaporator coil

















MODEL	CT1HC-1G	
EXTERNAL DIMENSIONAL DATA		
Width Overall	26"	
Depth Overall with Handle	33 5∕8"	
Height Overall	85"	
Number of Doors	1	
Depth with Door Open 90°	55 ½"	
Door Opening (in)	21 %" x 61 %"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	23.1	
Internal Width Overall (in)	22"	
Internal Depth Overall (in)	26 ½"	
Internal Height Overall (in)	62"	
Number of Shelves	3	
ELECTRICAL DATA		
Full Load Amperes 115/60/1	8.0	
REFRIGERATION DATA		
Horsepower*	4/5	
Capacity (BTU/Hr)*	Variable Speed Technology	
SHIPPING DATA		
Gross Weight - Crated	348 lbs	
Height - Crated	88"	
Width - Crated	41"	
Depth - Crated	33"	

*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

Cross Temp® Top Mount Freezer/Refrigerators Model: CT1HC-1G

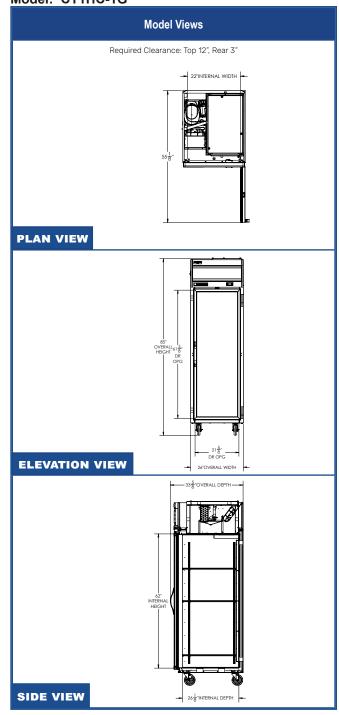

c(U) us 🔯 🔯 🚱 🗛 🔯



*ELECTRICAL CONNECTION

Unit pre-wired at factory and include 8' long cord and plug set.

