

Model Numbers

IHR-GT36-E
IHR-GT36-E-C
IHR-GT36-E-XB
IHR-GT36-E-M



Thick steel polished griddle plate for even heating across the entire surface.



Durable cast aluminum with a Valox™ heat protection grip.



5.3 KW element provides even heating throughout the oven cavity.



Splatter screen protects the element from spills.



IHR-GT36-E shown with optional SHS-36 shelf and casters

GRIDDLE TOPS - Highly polished griddle plate provide even heat across entire surface.

- 4 KW serpentine elements located under entire griddle plate.
- Thermostat maintains selected temperature during peak hours.
- 4" (102 mm) wide grease gutter and large grease can with 1 gallon (3.8 L) capacity.

STANDARD OVEN - High performance 5.3 KW element provides even heating throughout the oven interior.

- Unique baffle above the element distributes heat flow to provide even cooking temperatures throughout the oven. Splatter screen protects the element from spills.
- Chef depth standard oven interior accommodates standard 18" x 26" (457 x 660 mm) sheet pans front-to-back and side-by-side.
- Oven is 26½" w x 26" d x 14" h (673 x 660 x 356 mm).
- Heavy duty thermostat with temperature range from 150°F to 500°F (65°C to 260°C).
- Porcelainized sides, rear, deck and door lining.
- Stamped inner door liner provides extra strength while optimizing heat retention.
- One chrome oven rack is included.




CONVECTION OVEN - 5.3 KW convection oven with 1/4 hp blower motor cooks products quickly and evenly with less shrinkage.

- Convection oven interior dimensions 26-1/2" w x 22-1/2" d x 14" h (673 x 572 x 356 mm).
- Three position switch for cooking or cool down. Fan shuts off automatically when door is open.
- Porcelainized sides, rear, deck and door lining for easy cleaning.
- Three chrome oven racks included.




HEAVY DUTY RANGES GRIDDLE TOP

IMPERIAL®

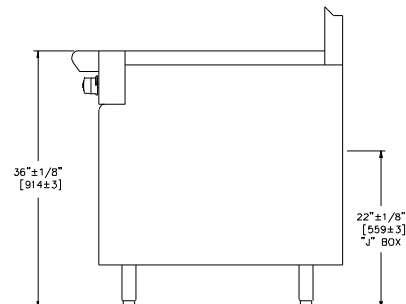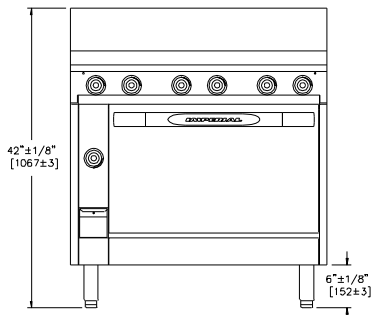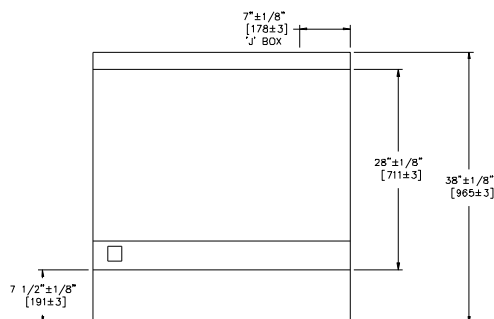

ELECTRIC GRIDDLE TOP RANGES

TOP	MODEL	RANGE DEPTH	RANGE WIDTH	SHIP (KW)	WEIGHT LBS
	IHR-GT36-E	38"	36"	(277)	610
	IHR-GT36-E-C	38"	36"	(304)	670
	IHR-GT36-E-XB	38"	36"	(200)	440
	IHR-GT36-E-M	38"	36"	(152)	335

Measurements in () are metric equivalents

NOTES

- "C" specifies (1) 26-1/2" (673 mm) Convection Oven
- "XB" specifies (1) Cabinet Base
- "M" specifies Modular, Counter Top Model

EXTERIOR

- Sleek European styling with wide radius ledge and optional high shelf
- Stainless steel front, sides, backguard, shelf, landing ledge and kick plate
- Welded and polished stainless steel seams
- Common ledges, backguards and shelves are available as options for a seamless, professional look
- Large 7" (178 mm) stainless steel landing ledge
- Unique cast aluminum control knobs feature a heat protection grip
- 6" (152 mm) high 2-1/2" (64 mm) diameter heavy duty legs with adjustable feet
- One year parts and labor warranty

DIMENSIONS

36" w x 38" d x 36" h*
(914 x 965 x 914 mm)

* to cooktop

CRATED DIMENSIONS

38-1/2" w x 41" d x 35" h
(978