	Project Name: _			AIA#:
Model #:		Location:		
		11 "	0	



# New Design!

# Gas Countertop Charbroiler

# You have options...

radiant or char rock heating units available in 15", 24", 36" and 48" widths.







#### Models

#### Radiant Heat Charbroiler - Stainless Steel

□ GCB15G-SR □ GCB24G-SR □ GCB36G-SR □ GCB48G-SR

## Radiant Heat Charbroiler - Cast Iron

□ GCB15G-CR □ GCB24G-CR □ GCB36G-CR □ GCB48G-CR

#### **Char Rock Charbroiler**

□ GCB15G-RK ☐ GCB24G-RK (pictured) ☐ GCB36G-RK □ GCB48G-RK

#### Standard Features

- Insulated double wall construction front and sides for superior heating efficiency with extended coolto-touch front edge
- Heavy duty, reversible, cast iron grates with drip flavor edge
- Heavy duty, cast iron char rock grid standard on char rock models
- Radiant covers available in stainless steel or heavy duty cast iron on radiant charbroiler models
- High performance 40,000 BTU per burner
- Stainless steel U-style burners provide heat control every 12" and flame every 6"
- Individual adjustable pilot for each burner with easy front panel access
- Removable, easy-to-clean, stainless steel catch tray
- Metal control knobs with set screws
- Adjustable 4" stainless steel legs
- Versatile grate position, angled or flat (backsplash 2" to 4", depending on grate position)
- Field convertible to radiant, char rock, or combination
- Unit ships natural gas with liquid propane gas (LP) conversion kit and regulator

### **Optional Accessories**


Replacement radiant and rock kits

To select options, see detailed list on back

## Warrantv

Two years parts and labor

Approved by:	Date:
• • • • • • • • • • • • • • • • • • • •	

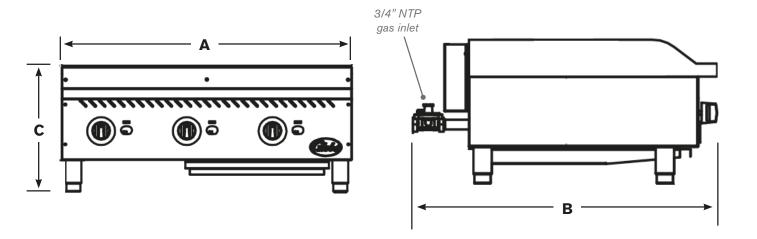

For indoor use only


DIMENSIONS   SHIPPING INFORMATION													
Reinforced carton for shipping. Weight of carton included below and may vary from shipment to shipment. Shipped on a pallet. Freight class 85.													
Model	Width	Depth	Height	Net Wt	No. Burners BTUs ea	Total BTUs	Cooking Area	Shipping Dimensions	Ship Wt				
GCB15G-SR GCB15G-CR GCB15G-RK	15" (38 cm)	30.32" (77 cm)	15.75" (40 cm)	78 lbs (35.4 kg)	1 40,000	40,000	15" x 20" (40 x 51 cm)	48" x 40" x 23" (122 cm x 102 cm x 58.4 cm)	101.4 lbs (46 kg)				
GCB24G-SR GCB24G-CR GCB24G-RK	24" (61 cm)	30.32" (77 cm)	15.75" (40 cm)	116.85 lbs (53 kg)	40,000	80,000	24" x 20" (91 x 51 cm)	48" x 40" x 23" (122 cm x 102 cm x 58.4 cm)	145.5 lbs (66 kg)				
GCB36G-SR GCB36G-CR GCB36G-RK	36" (91.5)	30.32" (77 cm)	15.75" (40 cm)	162.3 lbs (73.6 kg)	<u>3</u> 40,000	120,000	36" x 20" (91 x 51 cm)	48" x 40" x 23" (122 cm x 102 cm x 58.4 cm)	204.6 lbs (92.8 kg)				
GCB48G-SR GCB48G-CR GCB48G-RK	48" (122 cm)	30.32" (77 cm)	15.75" (40 cm)	220 lbs (99.8 kg)	40,000	160,000	48" x 20" (91 x 51 cm)	54" x 36" x 23" (137 cm x 91.4 cm x 58.4 cm)	272 lbs (123.4 kg)				

#### **GAS REQUIREMENTS AND INFORMATION**

- Natural gas or LP main supply required
- Conversion of unit from natural gas to LP must be completed by an authorized Globe servicer
- 3/4" standard pipe size I.D. connection

Gas charbroiler is constructed of stainless steel with extra-insulation in front and side walls with cool-to-touch front edge. Charbroiler has heavyduty reversible cast iron grates with versatile positioning angled or flat, and cast iron char rock grid on char rock models. Radiant covers available in stainless steel or cast iron for radiant charbroiler models. Unit has high performance 40,000 BTU stainless steel U-style burners to provide flame every 6". Field convertible to radiant, char rock or combination; ships natural gas with LP conversion kit included. Charbroiler is listed to NSF Standard 4 by ETL. 2 year parts and labor warranty.

#### **OPTIONAL/ADDITIONAL ACCESSORIES**



Note: Radiant heat charbroilers come standard with stainless steel radiant burner covers for heating. Cast iron radiant burner covers keep heat in longer and are stronger than standard stainless steel radiants.