

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

VISTA® BOTTOM MOUNT REACH-IN FREEZER

FB12HC Solid Door Reach-in Freezer Hydrocarbon Series

MODEL: FB12HC-1S



3 Year Parts/Labor Warranty Additional 4 Year Compressor Warranty

CABINET CONSTRUCTION

- Stainless steel front and door, gray painted sides
- Gray painted aluminum interior
- Full electronic control
- LED lighting
- Self-closing door with 120° Stay-open feature, on spring-loaded hinges
- Door lock (solid doors only)
- One-piece grille allow easy removal/installation for preventative maintenance
- Four (4) heavy duty epoxy coated wire shelves standard
- 6" Caster standard with (2) brakes

OPTIONS & ACCESSORIES

- Additional epoxy shelves
- Shelf clips
- 3" caster or 6" legs
- Remote option* (see note on back page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- Epoxy coated evaporator coil
- Maintains product temperatures of 0° F and below















3779 Champion Blvd., Winston-Salem, NC 27105




MODEL	FB12HC-1S
EXTERNAL DIMENSIONAL DATA	
Width Overall	24"
Depth Overall with Handle	26"
Height Overall with 6" casters	67 3/8"
Number of Doors	1
Depth with Door Open 90°	46 1/4"
Door Opening	20 7/8" x 48 5/8"
INTERNAL DIMENSIONAL DATA	
NET Capacity (cubic ft.)	11.8
Internal Width Overall (in)	21"
Internal Depth Overall (in)	19 3/4"
Internal Height Useable (in)	41 5/8"
Number of Shelves	4
ELECTRICAL DATA	
Full Load Amperes 115/60/1	5.0
REFRIGERATION DATA	
Horsepower	1/2
Capacity (BTU/Hr)*	1513
WEIGHT DATA	
Gross Weight (Crated lbs)	284 lbs
Height - Crated	68"
Width - Crated	27"
Depth - Crated	29"

*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

Bottom Mount Reach-in Freezer

Model: FB12HC-1S

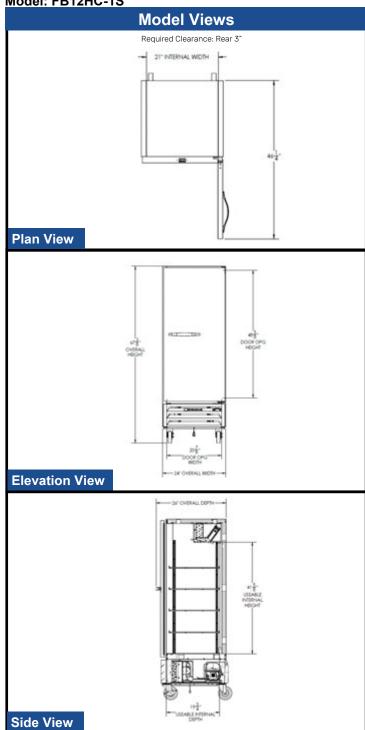

ELECTRICAL CONNECTION

















Units pre-wired at factory and include 8' long cord and plug set.