FRIGERATOR



| Project:  | AIA# |
|-----------|------|
| Item:     |      |
| Location: | SIS# |
| Approved: |      |

# **WORKTOP Refrigerator**

MODEL: WTR27AHC-SR

WTR27AHC Solid Door with Speed Rail, Whip Cream Holder & Milk Holes Hydrocarbon Series



# 3 Year Parts/Labor Warranty Additional 4 Year Compressor Warranty

## **CABINET CONSTRUCTION**

- Stainless steel front, sides, door and grille (galvanized back & bottom)
- Interior liner is made of corrosion resistant aluminum.
- Stainless steel top for added durability
- Full electronic control
- Interior thermometer is standard
- · 4" Removable backsplash for flexibility and ease of cleaning
- Self-closing doors with 120° stay-open feature, on cartridge style hinges
- Magnetic gasket attached to each door for positive seal
- 6" Casters, two (2) with brakes standard
- Two epoxy-coated steel wire shelves
- Field-reversible door (hinge kit not included)

## **OPTIONS & ACCESSORIES**

- Stainless steel back
- · Stainless steel interior
- 16 Gauge stainless steel top
- Additional shelves
- Shelf clips
- Right or left hinged door
- Locks (solid doors only)
- · Wire shelf divider
- Cutting board
- 3" Casters
- 6" legs (stainless steel, black or seismic/flange)
- Low profile casters
- Roller kit
- Remote option\* (see note on back on page)

#### REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- · Epoxy coated evaporator coil
- Refrigerators capable of maintaining product temperature between 36°F and 38°F




















| MODEL                              | WTR27AHC-SR   |  |
|------------------------------------|---------------|--|
| EXTERNAL DIMENSIONAL DATA          |               |  |
| Width Overall                      | 27"           |  |
| Depth Overall with Handle & Bumper | 36 ½"         |  |
| Height Overall with 6" Casters     | 39 %"         |  |
| Number of Doors                    | 1             |  |
| Depth with Door Open 90°           | 55 <b>%</b> " |  |
| Door Opening                       | 22 %" x 21 %" |  |
| INTERNAL DIMENSIONAL DATA          |               |  |
| NET Capacity (cubic ft.)           | 6.13          |  |
| Internal Width Overall (in)        | 23"           |  |
| Internal Depth Overall (in)        | 15 ½"         |  |
| Internal Height Overall (in)       | 23"           |  |
| Number of Shelves                  | 2             |  |
| ELECTRICAL DATA                    |               |  |
| Full Load Amperes                  | 2.0           |  |
| REFRIGERATION DATA                 |               |  |
| Horsepower                         | 1/10          |  |
| Capacity (BTU/Hr)                  | 1110          |  |
| SHIPPING DATA                      |               |  |
| Gross Weight - Crated              | 194 lbs       |  |
| Height - Crated                    | 36"           |  |
| Width - Crated                     | 30"           |  |
| Depth - Crated                     | 32"           |  |

\*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

# Worktop Refrigerator Models: WTR27AHC-SR

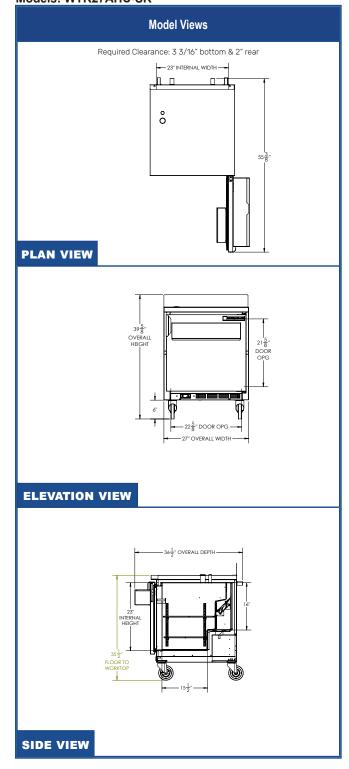

## \*ELECTRICAL CONNECTION



115/60/1 NEMA 5-15P Unit pre-wired at factory and include 8' long cord and plug set.

