

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

### VISTA® BOTTOM MOUNT REACH-IN FREEZER

FB19HC Glass Door Reach-in Freezer Hydrocarbon Series

MODEL: FB19HC-1G



## 3 Year Parts/Labor Warranty Additional 4 Year Compressor Warranty

#### **CABINET CONSTRUCTION**

- Stainless steel front and door, gray painted sides
- Gray painted aluminum interior
- Full electronic control
- LED lighting
- Self-closing door with 120° stay-open feature, on spring-loaded
- One-piece grille allows easy removal/installation for preventative maintenance
- Three (3) heavy duty epoxy coated wire shelves
- 6" Casters standard with (2) brakes

#### **OPTIONS & ACCESSORIES**

- Additional epoxy shelves (5 max per section)
- Shelf clips
- 3" Casters or 6" legs
- 6" Flanged/seismic feet
- Door locks
- Remote option\* (see note on back page)

#### **REFRIGERATION SYSTEM**

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Hot gas condensate evaporation
- Adaptive defrost
- Epoxy coated evaporator coil
- Maintains product temperatures of 0° F and below


















MODEL	FB19HC-1G
EXTERNAL DIMENSIONAL DATA	
Width Overall	27 1/4"
Depth Overall with Handle	27 9/16"
Height Overall	83 15/16"
Number of Doors	1
Depth with Door Open 90°	51 7/16"
Door Opening	24 1/16" x 52 9/16"
INTERNAL DIMENSIONAL DATA	
NET Capacity (cubic ft.)	17.87
Internal Width Overall (in)	24 1/8"
Internal Depth Overall (in)	19 7/8"
Internal Height Overall (in)	61 5/8"
Internal Height Useable (in)	52 15/16"
Number of Shelves	3
ELECTRICAL DATA	
Full Load Amperes 115/60/1	7.5
REFRIGERATION DATA	
Horsepower	3/4
Capacity (BTU/Hr)*	1927
SHIPPING DATA	
Gross Weight - Crated	380 lbs
Height - Crated	85"
Width - Crated	36"
Depth - Crated	34"

\*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

# Bottom Mount Reach-in Freezer

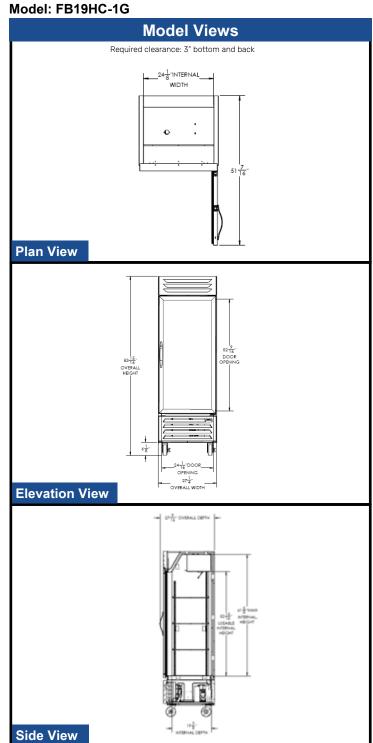

#### **ELECTRICAL CONNECTION**

















Unit pre-wired at factory and include 8' long cord and plug set.