



## DOUBLE CONVECTION OVENS ELECTRIC TURBO-FLOW

# IMPERIAL®


Model Numbers

ICVE-2

ICVDE-2



Turbo-Flow System provides even temperatures throughout the oven cavity.



Oven interior is porcelainized for easy cleaning.



Door handle is secured to an internal stainless steel chassis system, not the door finish.



Four bearings per door extend the life of the door mechanism.



ICVE-2 shown with optional casters

**TURBO-FLOW SYSTEM** - This system assures even cooking throughout the entire oven.

- Standard and Bakery depth oven sizes available.
- Cooked or baked products have less shrinkage, more moisture and taste better.
- Creates an air flow pattern that simultaneously heats the inner and outer surfaces of the oven cavity.
- Recirculates hot air to maximize efficiency for energy savings.
- Fast temperature recovery.
- 2-speed 1/2 hp fan motor for high production cooking and delicate baking.
- 2-speed oven cool down feature.
- Standard and Bakery depth ovens are rated 11 KW.
- Porcelainized oven interior for easy cleaning and provides better browning.
- 2 interior oven lights are controlled by a momentary switch outside the oven.
- 10 rack positions for maximum versatility.
- 5 oven racks included.



**EXTREME DUTY DOOR SYSTEM** - Extends the life of the door mechanism and eliminates side-to-side shaft movement.

- Double bearings on the top and bottom of each door, four bearings per door.
- Improved door pressure locking.
- Door chassis is fortified to withstand constant opening and closing.
- Handle is secured to an internal stainless steel chassis system, not the external door finish.

**DUAL OPEN DOORS** - One hand opens and closes both doors simultaneously.

- 60/40 doors open to 130° for complete interior access.
- Large window for viewing product at a glance.



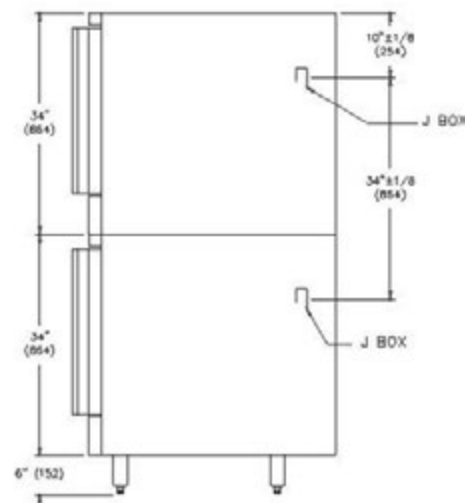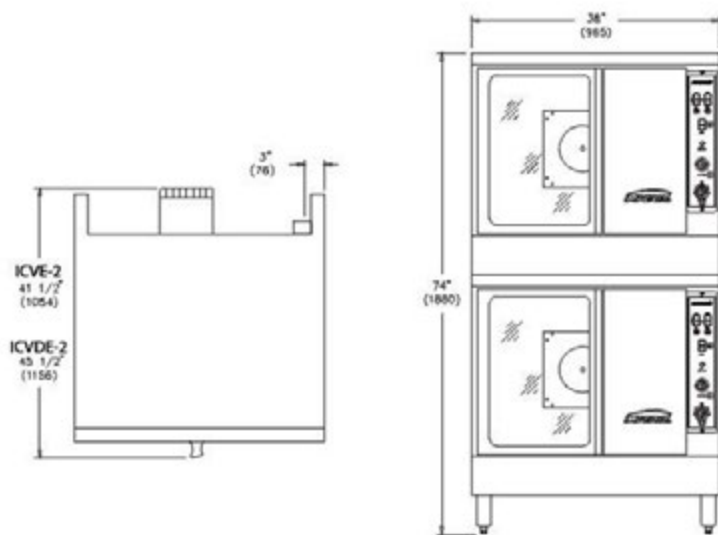

## ELECTRIC DOUBLE DECK CONVECTION OVENS

MODEL	DESCRIPTION	OUTPUT KW	SHIP WEIGHT (KG)	LBS
ICVE-2	Double Deck, Standard depth	22	(455)	1005
ICVDE-2	Double Deck, Bakery depth	22	(536)	1185

Measurements in ( ) are metric equivalents.

### NOTES

- "D" specifies Bakery Depth
- "HH" specifies Cook and Hold computer controls for (2) Ovens

### ELECTRICAL REQUIREMENT PER OVEN

VOLTS	PHASE	HERTZ	AMPS MAX.
208 V	1 ph	60 hz	53 amps, per oven
208 V	3 ph	60 hz	31 amps, per oven
240 V	1 ph	50/60 hz	46 amps, per oven
240 V	3 ph	50/60 hz	27 amps, per oven
480 V*	3 ph	50/60 hz	14 amps, per oven

\* For export only

### CLEARANCE REQUIREMENTS

For use only on non-combustible floors with legs or casters; or 2¼" (57 mm) overhang is required when curb mounted. 0" clearance from non-combustible side and rear walls. Provide 6" (152 mm) minimum clearance from combustible side walls and 0" from combustible wall at rear.

MODEL	DIMENSIONS	CRATED DIMENSIONS
ICVE-2	38" w x 41-1/2" d x 74" h (965 x 1054 x 1880 mm)	40" x 47-1/2" x 72" (1016 x 1206 x 1829 mm)
ICVDE-2	38" w x 45-1/2" d x 74" h (965 x 1156 x 1880 mm)	40" x 51-1/2" x 72" (1016 x 1308 x 1829 mm)

### EXTERIOR

- Stainless steel exterior, except back. Reflects a quality, professional look for exhibition cooking
- Welded and finished seams
- Stainless steel legs
- Easy to clean and maintain
- One year parts and labor warranty

### OPTIONS AND ACCESSORIES

- Cook and Hold computer controls
- Stainless steel back enclosure
- Direct connect vent
- Heavy duty casters, set of 4
- Stainless steel solid doors
- Extra oven racks
- 480 Volt for export



#### Manual Controls

- Manual controls are standard
- Independent time and temperature controls provide maximum versatility for general baking and roasting
- 2-speed fan switch controls bake or roast

#### Thermostatic oven control

- Snap Action temperature control 150° F to 550° F. (66° C to 260° C)

#### On-Off switch Timer

- 60 minute manual timer
- Audible buzzer lets you know when the cooking cycle is complete

#### Programmable Controls available as an option

