



Item: \_\_\_\_\_  
Quantity: \_\_\_\_\_  
Project: \_\_\_\_\_

# 48" Electric Restaurant Range

## 48" Electric Restaurant Range

Models: ☐ RRE-8 ☐ RRE-6GT12 ☐ RRE-4GT24 ☐ RRE-2GT36 ☐ RRE-GT48



Shown with optional casters

Voltage: ☐ 208V ☐ 240V  
Phase: ☐ 1 Phase ☐ 3 Phase

### Options and Accessories

- ☐ 6" high S/S stub back in lieu of high shelf
- ☐ 1" thick griddle plate
- ☐ Griddle on right (Left hand side standard)
- ☐ Chrome griddle plate
- ☐ Grooved griddle (specify width: \_\_\_\_\_")
- ☐ 9" deep S/S front landing ledge, with or without sauce pan cutouts
- ☐ Additional oven racks
- ☐ Open storage cabinet base - add suffix "-XB"
- ☐ Cabinet doors
- ☐ Intermediate shelf
- ☐ 5" swivel casters (set of four - 2 locking)

### Standard Features


- Stainless steel front, sides, control panel and kick plate including backguard and high shelf
- Stainless steel full width drip tray
- Oven with 4 KW heating element
- Oven thermostat controls, 200°-500°F
- Five position heavy gauge chrome rack guides
- One chrome rack per oven
- Five surface porcelain oven interior
- 9" solid hot plate elements, 2KW each
- 3/4 thick polished steel griddle plate
- GT Griddle Series - standard with thermostat every 12"
- One year limited warranty, parts and labor



**Royal Range of California, Inc.**  
3245 Corridor Dr. • Eastvale, CA 91752 • (800) 769-2414 • (951) 360-1600  
Fax: (951) 360-7500 • [www.royalranges.com](http://www.royalranges.com) • [sales@royalranges.com](mailto:sales@royalranges.com)



# 48" Electric Restaurant Range

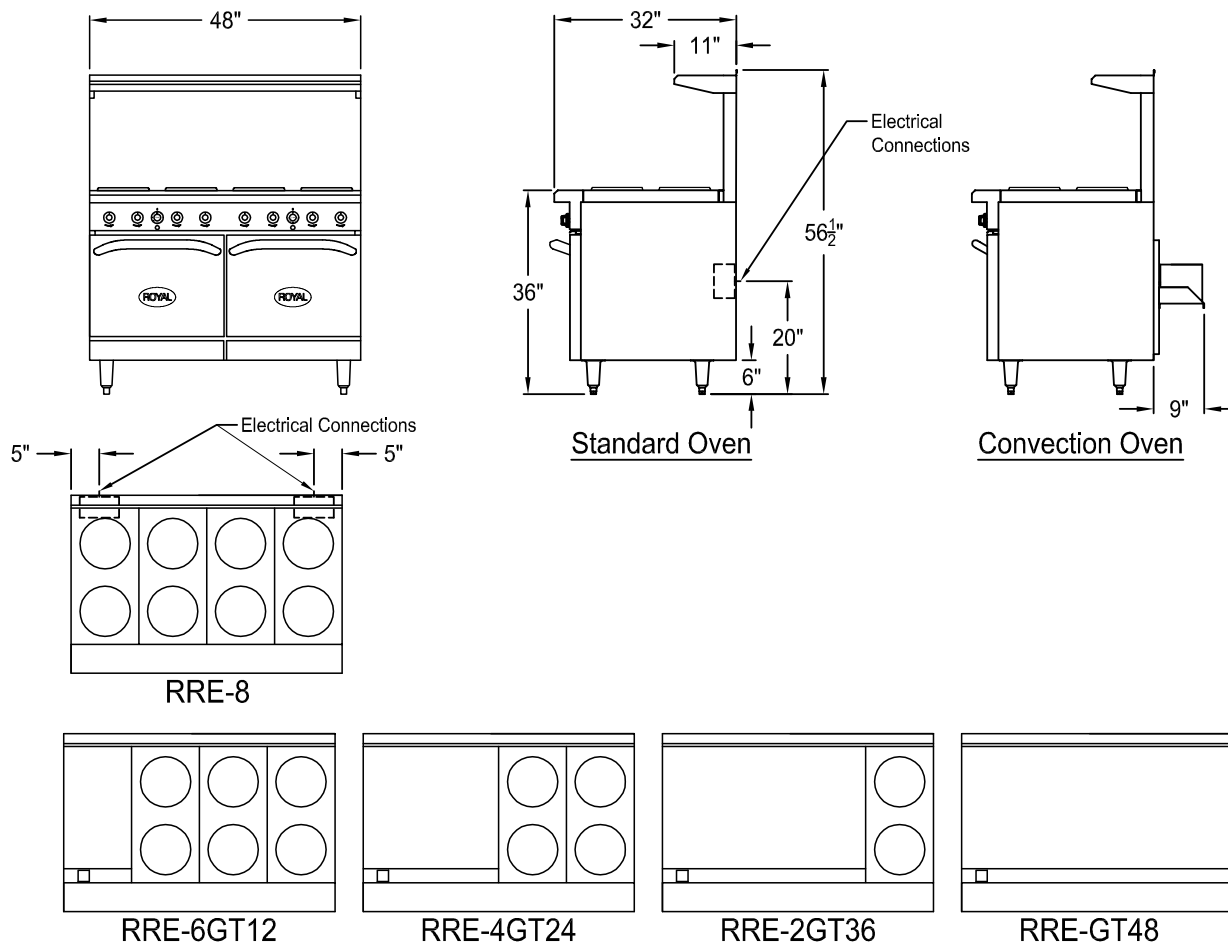

| Model Number | Total KW | Voltage | A M P S |     |         |    |    |
|--------------|----------|---------|---------|-----|---------|----|----|
|              |          |         | 1 Phase |     | 3 Phase |    |    |
|              |          |         | L1      | L3  | L1      | L2 | L3 |
| RRE-8        | 24       | 208     | 120     | 120 | 92      | 76 | 92 |
|              |          | 240     | 104     | 104 | 80      | 64 | 80 |
| RRE-6GT12    | 23.4     | 208     | 115     | 115 | 88      | 76 | 84 |
|              |          | 240     | 100     | 100 | 80      | 68 | 74 |
| RRE-4GT24    | 22.8     | 208     | 112     | 112 | 80      | 68 | 80 |
|              |          | 240     | 97      | 97  | 72      | 60 | 72 |
| RRE-2GT36    | 22.2     | 208     | 109     | 109 | 76      | 68 | 72 |
|              |          | 240     | 95      | 95  | 72      | 64 | 66 |
| RRE-GT48     | 21.6     | 208     | 106     | 106 | 68      | 60 | 68 |
|              |          | 240     | 92      | 92  | 64      | 56 | 64 |

**48" Electric Range units have two electrical connections.**

**To be installed only in noncombustible surroundings. See installation instructions.**

Due to continuing product development to ensure best possible performance, these specifications are subject to change without prior notification.

**Royal Range of California, Inc.**  
 3245 Corridor Dr. • Eastvale, CA 91752 • (800) 769-2414 • (951) 360-1600  
 Fax: (951) 360-7500 • [www.royalranges.com](http://www.royalranges.com) • [sales@royalranges.com](mailto:sales@royalranges.com)