

REFRIGERATOR MANUFACTURER
Turbo air
 more durable, efficient, beautiful

4184 E. Conant St.
 Long Beach, CA 90808
 Tel. 310-900-1000
 Fax. 310-900-1077
www.turboairinc.com

Project :

Model # :

Item # :

Qty :

Available W/H :

Approval :

Swing Door Merchandiser

Glass Door Merchandisers
 Refrigerators

Model : TGM-14RV-N6

FEATURES & BENEFITS

■ Hydrocarbon refrigerants (R-600a)

With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

■ Hot gas condensate system

Through Turbo Air's creative innovation, the condensate system surfaces have been specially treated to resist corrosion. This not only increases efficiency without the risk of refrigerant leakage from corrosion, but also prevents the overflow of condensate water.

■ LED advertising panel

LED lighting offers 5 times longer lasting life than fluorescents and conserves energy as well.

■ Double pane glass doors with Low-E glass

Energy saving double pane glass doors are equipped with Low- emissivity glass, which reduces outer heat gain and decreases energy consumption. It enhances energy efficiency and minimizes condensation. Lightweight door construction also reduces door maintenance and bushing wear, which in turn facilitates smoother door opening.

■ High-density polyurethane insulation

The entire cabinet structure and solid doors are foamed-in-place using high density, HCFC free polyurethane insulation.

■ Adjustable, heavy duty, PE (polyethylene) coated wire shelves

■ LED interior lighting

■ Refrigerator holds 33°F ~ 38°F for the best in beverage preservation



Model	Swing Door	CU./FT.	#of Shelves	HP	AMPS	Crated Weight (lbs.)	L x D x H (inches)
TGM-14RV-N6	1	12.17	Top : 3 Bottom : 1	1/5	2.2	187	235/8 x 233/8 x 735/8

Swing Door Merchandiser

Glass Door Merchandisers
Refrigerators

Model : TGM-14RV-N6

ELECTRICAL DATA		
Voltage	115/60/1	
Plug Type	 NEMA 5-15P	
Full Load Amperes	2.2	
Compressor HP	1/5	
Cord Length (ft.)	7	
Refrigerant	R-600a	
DIMENSIONAL DATA		
# of Doors	1	
Net Capacity (cu. ft.)	12.17	
Ext. Length Overall (in.)	23 ⁵ / ₈ (600mm)	
Ext. Depth Overall (in.)*	23 ³ / ₈ (594mm)	
Ext. Height Overall (in.)	73 ⁵ / ₈ (1870mm)	
Int. Length Overall (in.)	19 (483mm)	
Int. Depth Overall (in.)	19 ⁷ / ₈ (504mm)	
Int. Height Overall (in.)	57 ¹ / ₂ (1460mm)	
# of Shelves	Top	3
	Bottom	1
Shelf Size (LxD) (in.)		20 ³ / ₈ x 16 ⁷ / ₈
Bottle Capacity		150 (Full) 120 (Load Line)
Net Weight (lbs.)		168
Gross Weight (lbs.)		187

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

* Depth does not include 1-3/8" for door handle.

■ **WARRANTY :** 2 Year Parts and Labor Warranty
Additional 3 Year Warranty on Compressor

■ STANDARD FEATURES


- Anti-corrosion coated evaporator
- White color cabinet & black color frame on door

■ OPTIONAL ACCESSORIES


- Additional PE coated wire shelf: 30278F0300
- Gravity feed shelf: 30278F0400
- Sign panel (blank): 30214F0112

PLAN VIEW

(unit : inch)

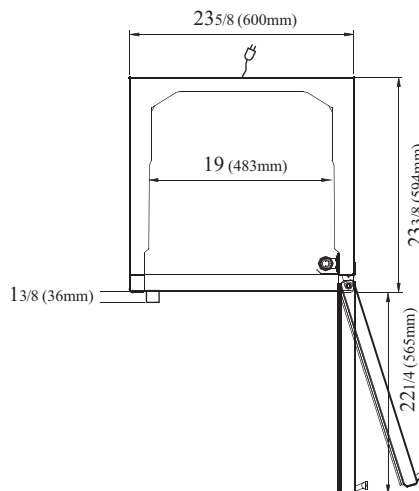

PLAN VIEW

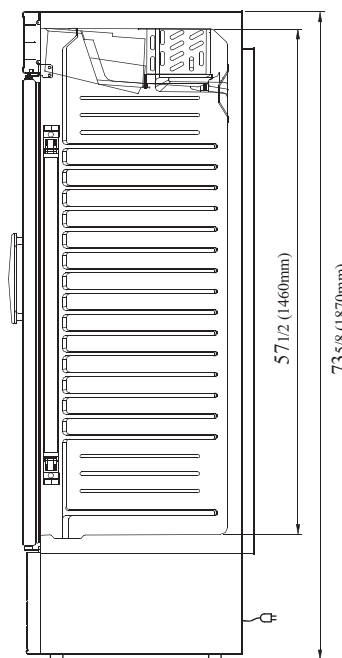

SIDE VIEW

Ver.20190926

NATURAL
Refrigerant

SPEC
ISO 9001:2008

ETL
Intertek

ETL
Intertek

2 YEAR
WARRANTY

5 YEAR
WARRANTY
ON COMPRESSOR

- Turbo Air : 800-627-0032
- GK : 800-500-3519
- Warranty : 800-381-7770
- AC : 888-900-1002

Turbo air
REFRIGERATOR MANUFACTURER

GERMAN KNIFE

RADIANCE

Turbo air
REFRIGERATION SYSTEM

Texaking